

TVT

Stock : 002835



NVMS
2.0

N9000

SUPER
LIVE

PRODUCT SELECTION

SHENZHEN TVT DIGITAL TECHNOLOGY CO.,LTD.



TVT SHENZHEN TVT DIGITAL TECHNOLOGY CO.,LTD.

ADDRESS: 23 Floor, Block B4,Building No.9,Shenzhen Bay Eco-Technology
Park,Nanshan District,Shenzhen,Guangdong Province, P.R.China


TEL: +86-755-36995888

FAX: +86-755-33306002

EMAIL: overseas@tvt.net.cn

WEB: <http://en.tvt.net.cn>

Access Control Terminal



Dual Lens



Anti-spoofing
Detection



Deep Learning
Algorithm



Face Recognition



Human Body
Temperature Measuring



Mixed Lighting



Full-Color



Audio Talk-down



Anti-tamper



Door Control



Card Reader



LCD Display



CE FC



ONVIF

ACCESS CONTROL TERMINAL

Access Control

- 1/2.8" CMOS
- 2 MP dual-lens camera
- Deep learning algorithm
- Anti-spoofing detection
- Face recognition in dark environment
- Face recognition accuracy>99.7%
- Face recognition duration(1:N) ≤ 0.5s
- White and IR supplement light
- Full-color, WDR, BLC, HLC, 3D NR, etc
- Built-in MIC and Speaker, audio talk-down
- Wiegand interface, Anti-Tamper



TD-E2123-IC/PE/TP/WF

3, 000 face database
3.6mm@F2.4
TN 3.5" touch screen, 480x320
1CH RJ45
1CH Wiegand
2.4G WiFi
Reset Button
1CH Lock
1CH Door contact input
Exit Button x1
Tamper Button x1
Built-in card reader



TD-E2127-IC

10, 000 face database
4.3mm@F1.6
IPS 6.97" LCD screen, 600x1024
1CH RJ45
1CH alarm out
1CH alarm in
1CH Wiegand
Reset Button
1CH Lock
1CH Door contact input
Exit Button x1
Tamper Button x1
Built-in card reader



TD-E2228-IC/TP

20, 000 face database
3.97mm@F1.6
IPS 8.0" touch screen, 800x1280
1CH RJ45
2CH alarm out
2CH alarm in
1CH Wiegand
1CH RS485; 1CH USB
Reset Button
1CH Lock; 1CH Door contact input
Exit Button x1; Tamper Button x1
Built-in SD card slot, up to 128GB
Built-in card reader



TD-E2128-S

20, 000 face database
3.97mm@F1.6
IPS 8.0" LCD screen, 800x1280
1CH RJ45
2CH alarm out
2CH alarm in
1CH Wiegand
1CH RS485; 1CH USB
Reset Button
1CH Lock
Exit Button x1
Tamper Button x1
Built-in SD card slot, up to 128GB



TD-E2128-L/TP

20, 000 face database
3.97mm@F1.6
IPS 8.0" touch screen, 800x1280
1CH RJ45
2CH alarm out
2CH alarm in
1CH Wiegand
1CH RS485; 1CH USB
Reset Button
1CH Lock
Exit Button x1
Tamper Button x1
Built-in SD card slot, up to 128GB



TD-E2128-TM/TP

Forehead temperature measuring
Temperature accuracy: ± 0.3°C
20, 000 face database
3.97mm@F1.6
IPS 8.0" touch screen, 800x1280
1CH RJ45
2CH alarm out; 2CH alarm in
1CH Wiegand
1CH RS485; 1CH USB
Reset Button
1CH Lock
Exit Button x1; Tamper Button x1
Built-in SD card slot, up to 128GB



TD-E2128-B/TM/TP

Wrist temperature measuring
Temperature accuracy: ± 0.3°C
20, 000 face database
3.97mm@F1.6
IPS 8.0" touch screen, 800x1280
1CH RJ45
2CH alarm out; 2CH alarm in
1CH Wiegand
1CH RS485; 1CH USB
Reset Button
1CH Lock
Exit Button x1; Tamper Button x1
Built-in SD card slot, up to 128GB

Thermal Cameras



Deep Learning
Algorithm



Human body
Temperature measuring



Fire Detection



Abnormal Temperature
Alarm



Sound & Light
Warning



Dual Image Fusion



SD Card



True WDR



H.265



IP66



CE

FC



PoE

ONVIF

ONVIF

THERMAL CAMERA

Human body temperature measuring Thermal Camera

- H.265/H.264
- Thermal image and optical image dual image fusion
- Built-in SD card, up to 256GB
- Built-in white light and loudspeaker, support sound and light warning

Thermal module:

- 17 μ m, NETD: ≤ 35 mK(@25°C, F#=1.0)
- Vanadium oxide uncooled focal plane detector
- Temperature range: 30°C~45°C
- Temperature accuracy: $\pm 0.5^\circ\text{C}$ (without blackbody), $\pm 0.3^\circ\text{C}$ (with blackbody)
- Multi-palette: white hot, black hot, iron oxide red, etc
- Temperature exception alarm

Optical module:

- 5MP 1/2.7" BSI+NIR CMOS
- Min.illumination(color): 0.0125lux@F2.0, AGC ON
- 120dB true WDR, BLC, HLC, Defog, 2D/3DNR, Smart IR, distortion image correction, ROI, etc.
- Video structure, intrusion detection, line crossing detection, target counting, face capture, etc.



TD-5433E1(FT/PE/VT)

384x288(2592x1944)
12.3mm@F1.0(8mm@F2.0)
1CH RJ45
1CH audio in
1CH built-in speaker
1CH alarm in
1CH alarm out
1CH RS485
20~30m IR distance
DV12V/PoE(IEEE802.3af)
278.3x100.2x88.7mm



TD-5002

+30°C~45°C adjustable
Radiation Area Size 80 x80mm
Temperature Accuracy 0.01°C
Temperature Stability $\pm 0.1^\circ\text{C}$
Temperature Stability $\pm (0.01)^\circ\text{C}/30\text{min}$
Effective Emissivity 0.95 ± 0.02
Working Environment 0~40°C
DC12V $\pm 20\%$
120x120x153mm

Security Thermal Cameras

- H.265+/H.265/H.264+/H.264/MJPEG
- Thermal image and optical image dual image fusion
- Built-in white light and loudspeaker, support sound and light warning
- Built-in SD card, up to 256GB

Thermal module:

- 12 μ m, NETD: \leq 50mK(@25°C, F#=1.0)
 - Vanadium oxide uncooled focal plane detector
 - Temperature range: -20°C~-150°C(-4°F~302°F)
 - Temperature accuracy: \pm 8°C
 - Multi-palette: white hot, black hot, iron oxide red, etc
 - temperature exception alarm, fire detection
- Region intrusion detection, line crossing detection, target counting

Optical module:

- 5MP 1/2.7" CMOS
- Min.illumination(color): 0.02lux@F1.6, AGC ON
- 120dB true WDR, BLC, HLC, Defog, 2D/3DNR, Smart IR, distortion image correction, ROI, etc.
- Video structure, intrusion detection, line crossing detection, target counting, face capture, etc.



TD-5422E1(PE/VT)

256x192(2592x1944)
 3.2mm@F1.1(4mm@F1.6), 7mm@F1.0(8mm@F2.0)
 1CH RJ45
 1CH audio in
 1CH audio out
 1CH built-in speaker
 1CH alarm in
 1CH alarm out
 20~30m IR distance
 DC12V/PoE(IEEE802.3af)
 217,8x80,5x80,3mm



TD-5433E1(PE/VT)

384x288(2592x1944)
 9.1mm@F1.0(8mm@F2.0), 13mm@F1.2(12mm@F2.0),
 19mm@F1.0(16mm@F2.0), 25mm@F1.0(16mm@F2.0)
 1CH RJ45
 1CH audio in
 1CH audio out
 1CH built-in speaker
 1CH alarm in
 1CH alarm out
 50~70m IR distance
 DV12V/DC24V/AC24V/PoE(IEEE802.3af)
 278,3x100,2x88,7mm



TD-5525E1(PE/VT)

256x192(2592x1944)
 3.2mm@F1.1(4mm@F1.6), 7mm@F1.0(8mm@F2.0)
 1CH RJ45
 1CH audio in
 1CH audio out
 1CH built-in MIC
 1CH built-in speaker
 1CH alarm in
 1CH alarm out
 20~30m IR distance
 DC12V/PoE(IEEE802.3af)
 ϕ 111,5x99,6mm

A3 SERIES IPC



Deep learning
algorithm



License plate
recognition



Video Structure



Perimeter Alert



Face Recognize



Abnormal
Alarm



Sound and
Light Alarm



Cyber Security



Starlight



True WDR



Smart H.265



Two-way audio



SD Card



IP67



IK10



CE

FC



PoE

ONVIF

Luxriot
Simple yet Powerful

AVIGILON

 OnSSI

exacq
From Tyco Security Products

Genetec


milestone

A3-PA

H.265S Perimeter Protection IP Camera

- 4MP@30fps(2592×1520), 1/2.7" CMOS
Min.illumination 0.0028lux @F1.2, AGC ON
- 5MP@30fps(2592×1944), 1/2.7" CMOS
Min.illumination 0.0045lux @F1.2, AGC ON
- 120dB True WDR, 3DNR, BLC
- H.265S/H.265+/H.264+/H.264/MJPEG
- Support ROI, two-way audio, aisle mode, ONVIF
- Perimeter alert, abnormal video signal detection, smart alarm
- Support Sound & Light warning
- Built-in SD card slot, up to 256GB
- IP67, -30°C~+60°C, 95% humidity
- DC12V/PoE



TD-9452A3-PA

Motorized varifocal: 2.8-12mm
 1CH RJ45 ethernet
 1-ch audio in
 1-ch audio out
 1-ch build-in speak
 1CH alarm in
 1CH alarm out
 30-50m IR distance
 217.7×80.5×80.5mm



TD-9555A3-PA

Motorized varifocal: 2.8-12mm
 1CH RJ45 ethernet
 1-ch audio in
 1-ch audio out
 1-ch build-in speak
 1CH built-in MIC
 1CH alarm in
 1CH alarm out
 30-50m IR distance
 φ111.5×99.6mm



TD-9442A3B-PA

Motorized varifocal: 2.8-12mm
 1CH RJ45 ethernet
 1-ch audio in(Line in)
 1-ch build-in speak
 1CH alarm in
 1CH alarm out
 30-50m IR distance
 217.8×80.5×80.3mm



TD-9545A3B-PA

Motorized varifocal: 2.8-12mm
 1CH RJ45 ethernet
 1-ch audio in(Line in)
 1-ch build-in MIC in
 1-ch build-in speak
 1CH alarm in
 1CH alarm out
 30-50m IR distance
 φ111.5×99.6mm

NETWORK CAMERA

A3-LR

2MP H.265S ANPR IP Camera

- 2MP@30fps (1920×1080), 1/2.8" Starlight CMOS
- Min.illumination: 0.0026 @F1.2, AGC ON
- 120dB True WDR, 3DNR, BLC
- H.265S/H.265+/H.264+/H.264/MJPEG
- Support ROI, two-way audio, aisle mode, ONVIF
- License plate recognition, abnormal video signal detection, smart alarm
- Built-in SD card slot, up to 256GB
- IP67, -30°C~+60°C, 95% humidity
- DC12V/PoE

A3-FC/FR

A3-FC-2MP H.265S Face Capture IP Camera A3-FR-2MP H.265S Face Recognition IP Camera

- 2MP @30fps(1920×1080), 1/2.8" Starlight CMOS
- Min.illumination: 0.0026 @F1.2, AGC ON
- 120dB True WDR, 3DNR, BLC
- H.265S/H.265+/H.264+/H.264/MJPEG
- Support ROI, two-way audio, aisle mode, ONVIF
- Face detection, face capture, face recognition, abnormal video signal detection, smart alarm
- Built-in SD card slot, up to 256GB
- Support face exposure
- IP67, -30°C~+60°C, 95% humidity
- DC12V/PoE



TD-9322A3-LR

Lens mount: CS
1CH RJ45 ethernet
2CH alarm in
2CH alarm out
1CH audio in
1CH audio out
1CH built-in MIC
1CH USB
1CH RS 485
143×79×64mm



TD-9423A3-LR

Motorized varifocal: 2.8-12mm
1CH RJ45 ethernet
1CH alarm in
1CH alarm out
1CH audio in
1CH audio out
1CH RS 485
50-70m IR distance
279.5×100.3×88.9mm



TD-9322A3-FC

Lens mount: CS
1CH RJ45 ethernet
2CH alarm in
2CH alarm out
1CH audio in
1CH audio out
1CH built-in MIC
1CH CVBS out
1CH RS 485
143×79×64mm



TD-9422A3-FC

Fixed lens: 8mm/12mm
1CH RJ45 ethernet
1-ch audio in
10m white light distance
217.7×80.5×80.5mm

■ NETWORK CAMERA



TD-9423A3-FC

Motorized varfocal: 7-22mm
1CH RJ45 ethernet
1CH alarm in
1CH alarm out
1CH audio in
1CH audio out
1CH CVBS out
10m white light distance
279.5×100.3×88.9mm



TD-9523A3-FC

Motorized varfocal: 7-22mm
1CH RJ45 ethernet
1CH alarm in
1CH alarm out
1CH audio in
1CH audio out
1CH built-in MIC
1CH CVBS out
ø141×100.2mm



TD-9525A3-FC

Motorized varfocal: 7-22mm
1CH RJ45 ethernet
1-ch audio in
1CH built-in MIC
10m white light distance
ø111.5×99.6mm



TD-9322A3-FR

Lens mount: CS
1CH RJ45 ethernet
1CH alarm in
1CH alarm out
1CH audio in
1CH audio out
1CH built-in MIC
1CH CVBS out
153×79×64mm



TD-9423A3-FR

Motorized varfocal: 7-22mm
1CH RJ45 ethernet
1CH alarm in
1CH alarm out
1CH audio in
1CH audio out
10m white light distance
279.5×100.3×88.9mm



TD-9523A3-FR

Motorized varfocal: 7-22mm
1CH RJ45 ethernet
1CH alarm in
1CH alarm out
1CH audio in
1CH audio out
1CH built-in MIC
1CH CVBS out
ø141×100.2mm



TD-9525A3-FR

Motorized varfocal: 7-22mm
1CH RJ45 ethernet
1-ch audio in
1-ch built-in MIC in
10m white light distance
ø111.5×99.6mm

NETWORK CAMERA

A3L-FR

H.265S Face Recognition IP Camera

- 2MP @30fps(1920×1080), 1/2.8" Starlight CMOS
- Min.illumination: 0.0026 @F1.2, AGC ON
- 120dB True WDR, 3DNRtBLC
- H.265S/H.265+/H.264+/H.264/MJPEG
- Support ROI, two-way audio, aisle mode, ONVIF
- Face detection, face capture, face recognition, abnormal video signal detection, smart alarm
- Built-in SD card slot, up to 256GB
- Support face exposure
- IP67, -30°C~+60°C, 95% humidity
- DC12V/PoE



TD-9322A3-LR

Lens mount: CS
1CH RJ45 ethernet
2CH alarm in
2CH alarm out
1CH audio in
1CH audio out
1CH built-in MIC
1CH USB
1CH RS 485
143×79×64mm



TD-9423A3-LR

Motorized varifocal: 2.8-12mm
1CH RJ45 ethernet
1CH alarm in
1CH alarm out
1CH audio in
1CH audio out
1CH RS 485
50-70m IR distance
279.5×100.3×88.9mm



TD-9422A3L-FR

Fixed lens: 8mm, 12mm
1CH RJ45 ethernet
1-ch audio in
1CH alarm in
1CH alarm out
1CH CVBS out
10m hybrid Light distance
153×79×64mm



TD-9426A3L-FR

Motorized varifocal: 7-22mm
Fixed lens: 6mm, 8mm optional
1CH RJ45 ethernet
1-ch audio in
1CH audio out
1CH alarm in
1CH alarm out
8m hybrid Light distance
279.5×100.3×88.9mm



TD-9524A3L-FR

Fixed lens: 3.6mm, 6mm optional
1CH RJ45 ethernet
1-ch audio in
1CH built-in MIC
1CH CVBS out
5m hybrid Light distance
φ141×100.2mm



TD-9525A3L-FR

Motorized varifocal: 7-22mm
1CH RJ45 ethernet
1-ch audio in
1CH built-in MIC
1CH alarm in
1CH alarm out
8m hybrid Light distance
φ111.5×99.6mm

M3 SERIES IPC



Deep learning
algorithm



Video Structure



Face Recognition



Perimeter Alert



Target Counting



LPR



Cyber Security



Starlight



Smart H.265



SD Card



Auto IRIS



True WDR



Two-way Audio



IP67



IK10



CE

FC



PoE

ONVIF

■ NETWORK CAMERA

M3-4MP

H.265 IP Camera

- 4MP(2592x1520)@30fps, 1/1.79" starlight CMOS
- Support HFR mode, 1080P/720P@60fps
- Min.Illumination:0.0005lux@F1.2, AGC ON;0lux with IR
- Auto Iris(DC-Iris/P-Iris)
- true WDR, 3DNR, BLC, HLC, defog, NIR, ROI coding, smart IR, etc.
- Smart H.265/H.265+/H.265/smart H.264/H.264+/H.264/MJPEG
- Support video structure, LPR, perimeter protection, target counting, exception detection, face recognition, etc
- Support smart alarm
- Support image distortion correction
- Built-in SD card slot, up to 256GB



TD-9342M3

C/CS Lens mount
ABF, DC-Iris
1CH RJ45 ethernet
1CH CVBS out
1CH audio in
1CH audio out
1CH built-in MIC
2CH alarm in
2CH alarm out
1CH USB
1CH RS485
AC24V/DC12V/PoE
160.8x79.0x64.0mm
-30°C~+60°C, less than 95% humidity



TD-9444M3

Motorized varifocal 2.8-12/8-32mm
P-Iris
1CH RJ45 ethernet
1CH CVBS out
1CH audio in
1CH audio out
1CH alarm in
1CH alarm out
1CH RS485
DC12V/200mA out
70~100 m IR distance
AC24V/DC12V/PoE
411.9x155.3x188mm
-50°C~+60°C, less than 95% humidity



TD-9543M3

Motorized varifocal 2.8~12mm
P-Iris
1CH RJ45 ethernet
1CH CVBS out
1CH audio in
1CH built-in MIC
1CH audio out
1CH alarm in
1CH alarm out
1CH RS485
30~50m IR distance
AC24V/DC12V/PoE
φ155.3x143.0mm
-50°C~+60°C, less than 95% humidity

E3 SERIES IPC



Deep learning algorithm



Video Structure



Face detection



Perimeter protection



Target counting



Heat Map



Cyber Security



Smart IR 2.0



Smart H.265



SD Card



Fisheye



Multiple resolution



NIR



IP67



IK10



CE

FC



PoE

ONVIF



AVIGILON



exacq
From Tyco Security Products



NETWORK CAMERA

E3-8MP

H.265 IP Camera

- 8MP(3840×2160)@30fps, 1 / 1.8" CMOS
- Min.Illumination(color) 0.008 lux @F1.2, AGC ON
- 120dB True WDR, 3DNR, BLC, HLC, NIR, ROI coding, Image Distortion Correction, etc
- Smart H.265+/H.265+/H.265/Smart H.264/H.264+/H.264/MJPEG
- Face Detection, Face Capturing, Video Structure, Target Counting, Perimeter Protection, etc
- Built-in SD card slot, up to 256GB
- IP67, -30°C~+60°C, 95% humidity

4K



TD-9382E3

Lens mount: C/CS
 1CH RJ45 ethernet
 2CH alarm in
 2CH alarm out
 1CH audio in
 1CH audio out
 1CH built-in MIC
 1CH CVBS out
 1CH RS485
 AC24V/DC12V/PoE
 160.8×79×64mm

4K



TD-9483E3

Motorized varifocal: 2.8-12mm
 1CH RJ45 ethernet
 1CH alarm in
 1CH alarm out
 1CH audio in
 1CH audio out
 1CH CVBS out
 50-70m IR distance
 DC12V/PoE
 279.5×100.3×88.9mm

4K



TD-9583E3

Motorized varifocal: 2.8-12mm
 1CH RJ45 ethernet
 1CH alarm in
 1CH alarm out
 1CH audio in
 1CH audio out
 1CH built-in MIC
 1CH CVBS out
 30-50m IR distance
 DC12V/PoE
 φ141×100.2mm

4K



TD-9585E3

Motorized varifocal: 2.8-12mm
 1CH RJ45 ethernet
 1CH audio in
 1CH built-in MIC
 30-50m IR distance
 DC12V/PoE
 φ111.5×99.6mm

E3L-8MP

H.265 IP Camera

- 8MP(3840×2160)@30fps, 1 / 2.8" CMOS
- Min.illumination(color) 0.01 Lux @ F1.2, AGC ON
- 120dB True WDR, 3DNR, BLC, HLC, Defog, ROI coding, Image Distortion Correction, etc
- Smart H.265/H.265+/H.265/Smart H.264/H.264+/H.264/MJPEG
- Face Detection, Face Capturing, Video Structure, Target Counting, Perimeter Protection, etc
- Built-in SD card slot, up to 256GB
- IP67, -30°C~+60°C, 95% humidity

NETWORK CAMERA

4K



TD-9382E3L

Lens mount: C/CS
1CH RJ45 ethernet
2CH alarm in
2CH alarm out
1CH audio in
1CH audio out
1CH built-in MIC
1CH CVBS out
1CH RS485
AC24V/DC12V/PoE
160.8x79x64mm

4K



TD-9482E3L

Fixed lens: 2.8mm
1CH RJ45 ethernet
1CH audio in
30-50m IR distance
DC12V/PoE
217.7×80.5×80.5mm

E3-IPC

4K



TD-9483E3L

Motorized varifocal: 2.8-12mm
1CH RJ45 ethernet
1CH alarm in
1CH alarm out
1CH audio in
1CH audio out
1CH CVBS out
50-70m IR distance
DC12V/PoE
279.5×100.3×88.9mm

4K



TD-9581E3L

Fixed lens: 2.8mm
1CH RJ45 ethernet
1CH alarm in
1CH alarm out
1CH audio in
1CH built-in MIC
20-30m IR distance
DC12V/PoE
φ119×87.8mm

4K



TD-9583E3L

Motorized varifocal: 2.8-12mm
1CH RJ45 ethernet
1CH alarm in
1CH alarm out
1CH audio in
1CH audio out
1CH built-in MIC
1CH CVBS out
30-50m IR distance
DC12V/PoE
φ141×100.2mm

4K



TD-9584E3L

Fixed lens: 2.8mm
1CH RJ45 ethernet
1CH audio in
1CH built-in MIC
20-30m IR Distance
DC12V/PoE
φ 94.6 × 82.8mm

4K



TD-9585E3L

Motorized varifocal: 2.8-12mm
1CH RJ45 ethernet
1CH audio in
1CH built-in MIC
30-50m IR distance
DC12V/PoE
φ111.5×99.6mm

NETWORK CAMERA

E3A-5MP

H.265 IP Camera

- 5MP(2592×1944)@30fps, 1 / 2.7 °CMOS
- Min.illumination(color) 0.006 lux@F1.2, AGC ON
- 120dB True WDR, 3DNR, BLC, HLC, NIR, Smart IR, ROI coding, etc
- Smart H.265/H.265+/H.265/Smart H.264/H.264+/H.264/MJPEG
- Face detection, Face Capturing, Video Structure, Target Counting, Perimeter Protection, etc
- Built-in SD card slot, up to 256GB
- IP67, -30°C~+60°C, 95% humidity



TD-9452E3A

Motorized varifocal: 2.8-12mm
 Fixed lens: 2.8mm, 3.6mm
 1CH RJ45 ethernet
 1CH audio in
 30-50m IR distance
 DC12V/PoE
 217.7×80.5×80.5mm



TD-9453E3A

Motorized varifocal: 2.8-12/7-22mm
 1CH RJ45 ethernet
 1CH alarm in
 1CH alarm out
 1CH audio in
 1CH audio out
 1CH CVBS
 50~70m/70~100m IR distance
 DC12V/PoE
 279.5×100.3×88.9mm



TD-9551E3A

Fixed lens: 2.8mm, 3.6mm
 1CH RJ45 ethernet
 1CH alarm in
 1CH alarm out
 1CH audio in
 1CH built-in MIC
 20-30m IR distance
 DC12V/PoE
 φ119×87.8mm



TD-9553E3A

Motorized varifocal: 2.8-12mm
 1CH RJ45 ethernet
 1CH alarm in
 1CH alarm out
 1CH audio in
 1CH audio out
 1CH built-in MIC
 1CH CVBS
 30-50m IR distance
 DC12V/PoE
 φ141×100.2mm



TD-9554E3A

Fixed lens: 2.8mm, 3.6mm
 1CH RJ45 ethernet
 1CH audio in
 1CH built-in MIC
 20-30m IR distance
 DC12V/PoE
 φ94.6×82.8mm



TD-9555E3A

Motorized varifocal: 2.8-12mm
 1CH RJ45 ethernet
 1CH audio in
 1CH built-in MIC
 30-50m IR distance
 DC12V/PoE
 φ115.5×99.6mm



TD-9557E3A

Fixed lens: 2.8mm, 3.6mm
 1CH RJ45 ethernet
 1CH audio in
 1CH built-in MIC
 10m-20m IR distance
 DC12V/PoE
 φ110x59.8mm



TD-9552E3A

Motorized varifocal 2.8-12mm
 1CH RJ45 ethernet
 1CH alarm in
 1CH alarm out
 1CH audio in
 1CH audio out
 1CH built-in MIC
 20-30m IR distance
 DC12V/PoE
 φ 121.6×95.9mm



TD-9451E3A

Fixed lens: 2.8mm, 3.6mm
 1CH RJ45 ethernet
 1CH audio in
 20m-30m IR distance
 DC12V/PoE
 φ110x58mm



TD-9352E3A

Lens mount: C/CS
 1CH RJ45 ethernet
 2CH alarm in
 2CH alarm out
 1CH audio in
 1CH audio out
 1CH built-in MIC
 1CH CVBS out
 1CH RS485
 AC24V/DC12V/PoE
 160.8×79×64mm

E3-4MP

H.265 IP Camera

- 4MP(2592×1520)@30fps, 1/3" CMOS
- Min.illumination(color) 0.0028 lux@F1.2, AGC ON
- 120dB True WDR, 3DNR, BLC, HLC, NIR, Smart IR, ROI coding, Image, Distortion Correction, etc
- Smart H.265/H.265+/H.265/Smart H.264/H.264+/H.264/MJPEG
- Face Detection, Face Capturing, Video Structure, Target Counting, Perimeter Protection, etc
- Built-in SD card slot, up to 128GB
- IP67, -30°C~+60°C, 95% humidity



TD-9442E3

Motorized varifocal: 2.8-12mm
 Fixed lens: 2.8mm, 3.6mm
 1CH RJ45 ethernet
 1CH audio in
 30-50m IR distance
 DC12V/PoE
 217.7×80.5×80.5mm



TD-9443E3

Motorized varifocal: 2.8-12/7-22mm
 1CH RJ45 ethernet
 1CH alarm in
 1CH alarm out
 1CH audio in
 1CH audio out
 1CH CVBS out
 50~70m/70~100m IR distance
 DC12V/PoE
 279.5×100.3×88.9mm

NETWORK CAMERA



TD-9541E3

Fixed lens: 2.8mm, 3.6mm
 1CH RJ45 ethernet
 1CH alarm in
 1CH alarm out
 1CH audio in
 1CH built-in MIC
 20-30m IR distance
 DC12V/PoE
 φ119×87.8mm



TD-9543E3

Motorized varifocal: 2.8-12mm
 1CH RJ45 ethernet
 1CH alarm in
 1CH alarm out
 1CH audio in
 1CH audio out
 1CH built-in MIC
 1CH CVBS out
 30-50m IR distance
 DC12V/PoE
 φ141×100.2mm



TD-9544E3

Fixed lens: 2.8mm, 3.6mm
 1CH RJ45 ethernet
 1CH audio in
 1CH built-in MIC
 20-30m IR distance
 DC12V/PoE
 φ94.6×82.8mm



TD-9545E3

Motorized varifocal: 2.8-12mm
 1CH RJ45 ethernet
 1CH audio in
 1CH built-in MIC
 30-50m IR distance
 DC12V/PoE
 φ111.5×99.6mm



TD-9547E3

Fixed lens: 2.8mm, 3.6mm
 1CH RJ45 ethernet
 1CH audio in
 1CH built-in MIC
 10-20m IR distance
 DC12V/PoE
 φ110×59.8mm



TD-9542E3

Motorized varifocal: 2.8-12mm
 1CH RJ45 ethernet
 1CH alarm in
 1CH alarm out
 1CH audio in
 1CH audio out
 1CH built-in MIC
 20-30m IR distance
 DC12V/PoE
 φ121.6×95.9mm



TD-9441E3

Fixed lens: 2.8mm, 3.6mm
 1CH RJ45 ethernet
 1CH audio in
 20m-30m IR distance
 DC12V/PoE
 167.5×74.5×74.5mm



TD-9342E3

Lens mount: C/CS
 1CH RJ45 ethernet
 2CH alarm in
 2CH alarm out
 1CH audio in
 1CH audio out
 1CH built-in MIC
 1CH CVBS
 1CH RS485
 DC12V/PoE
 160.8×79×64mm

E3-2MP

H.265 IP Camera

- 2MP(1920×1080)@30fps, 1/2.8 "CMOS
- Min.Illumination(color) 0.0028 lux@F1.2, AGC ON
- 120dB True WDR, 3DNR, BLC, HLC, Smart IR, ROI coding, Corridor Mode, Image Distortion Correction, etc
- Smart H.265/H.265+/H.265/Smart H.264/H.264+/H.264/MJPEG
- Face Detection, Face Capturing, Video Structure, Target Counting, Perimeter Protection, etc
- Built-in SD card slot, up to 256GB
- IP67, -30°C~+60°C, 95% humidity



TD-9422E3

Motorized varifocal: 2.8-12mm
 Fixed lens: 2.8mm, 3.6mm
 1CH RJ45 ethernet
 1CH audio in
 30-50m IR distance
 DC12V/PoE
 217.7×80.5×80.5mm



TD-9423E3

Motorized varifocal: 2.8-12mm
 1CH RJ45 ethernet
 1CH alarm in
 1CH alarm out
 1CH audio in
 1CH audio out
 1CH CVBS out
 50-70m IR distance
 DC12V/PoE
 279.5×100.3×88.9mm



TD-9521E3

Fixed lens: 2.8mm, 3.6mm
 1CH RJ45 ethernet
 1CH alarm in
 1CH alarm out
 1CH audio in
 1CH built-in MIC
 20-30m IR distance
 DC12V/PoE
 φ119×87.8mm



TD-9523E3

Motorized varifocal: 2.8-12mm
 1CH RJ45 ethernet
 1CH alarm in
 1CH alarm out
 1CH audio in
 1CH audio out
 1CH built-in MIC
 1CH CVBS out
 30-50m IR distance
 DC12V/PoE
 φ141×100.2mm



TD-9524E3

Fixed lens: 2.8mm, 3.6mm
 1CH RJ45 ethernet
 1CH audio in
 1CH build-in MIC
 20-30m IR distance
 DC12V/PoE
 φ94.6×82.8mm



TD-9525E3

Motorized varifocal: 2.8-12mm
 1CH RJ45 ethernet
 1CH audio in
 1CH build-in MIC
 30-50m IR distance
 DC12V/PoE
 φ111.5×99.6mm

■ NETWORK CAMERA



TD-9527E3

Fixed lens: 2.8mm, 3.6mm
 1CH RJ45 ethernet
 1CH audio in
 1CH built-in MIC
 10-20m IR distance
 DC12V/PoE
 φ110x59.8mm



TD-9522E3

Manual varifocal: 2.8-12mm
 1CH RJ45 ethernet
 1CH alarm in
 1CH alarm out
 1CH audio in
 1CH audio out
 1CH built-in MIC
 20-30m IR distance
 DC12V/PoE
 φ 121.6×95.9mm



TD-9421E3

Fixed lens: 2.8mm, 3.6mm
 1CH RJ45 ethernet
 1CH audio in
 20m-30m IR distance
 DC12V/PoE
 167.5x74.5x74.5mm



TD-9322E3

Lens mount: C/CS
 1CH RJ45 ethernet
 2CH alarm in
 2CH alarm out
 1CH audio in
 1CH audio out
 1CH built-in MIC
 1CH CVBS
 1CH RS485
 AC24V/DC12V/PoES
 160.8×79×64mm

Fisheye IP Camera

- 6MP 1/2.9" CMOS
- Effective pixels: 2160×2160
- Min.illumination: 0.068lux@F2.0, AGC ON; 0lux with IR
- H.265/H.264/MJPEG
- DWDR, 3D NR, HLC, BLC, ROI coding, etc
- Built-in SD card slot, up to 128GB
- Support ePTZ



TD-9568E2

Fixed lens: 1.07mm
 1CH RJ45 ethernet
 1CH alarm in
 1CH alarm out
 1CH audio in
 1CH audio out
 1CH built-in MIC
 1CH CVBS
 1CH RS485
 20-30m IR distance
 DC12V/PoE
 φ 130×41mm

E3B-5MP

NDAA

H.265 IP Camera

- NOVATEK SoC,NDAA Compliance
- 5MP(2592x1944)@30fps, 1/2.7" CMOS
- Support HFR mode
- Min.Illumination(color):0.007lux@F1.2,AGC ON;0lux with IR
- H.265+ / H.265 / H.264+ / H.264 / MJPEG
- DC-Iris,120dB True WDR,3DNR,BLC,HLC,Defog,NIR,smart IR,ROI coding,image distortion correction,etc
- Support AI functions,such as video structure,perimeter protection,target counting,face detection,exception detection,etc
- Built-in SD card slot,up to 256GB



TD-9551E3B

Fixed lens: 2.8mm,3.6mm
 1CH RJ45 Ethernet
 1CH alarm in
 1CH alarm out
 1CH audio in
 1CH built-in MIC
 20-30m IR Distance
 DC12V/PoE
 ϕ119 × 87.8mm



TD-9552E3B

Motorized Varifocal: 2.8-12mm
 1CH RJ45 Ethernet
 1CH alarm in
 1CH alarm out
 1CH audio in
 1CH audio out
 1CH built-in MIC
 20-30m IR Distance
 DC12V/PoE
 ϕ121.6 × 95.9mm



TD-9352E3B

Lens Mount: CS
 1CH RJ45 Ethernet
 2CH alarm in
 2CH alarm out
 1CH audio in
 1CH audio out
 1CH built-in MIC
 1CH CVBS out
 1CH RS485
 AC24V/DC12V/PoE
 160.8 × 79 × 64mm



TD-9451E3B

Fixed lens: 2.8mm,3.6mm
 1CH RJ45 Ethernet
 1CH audio in
 20-30m IR Distance
 DC12V/PoE
 167.5 x 74.5 x 74.5 mm



TD-9452E3B

Motorized Varifocal:2.8-12mm
 Fixed lens: 2.8mm,3.6mm
 1CH RJ45 Ethernet
 1CH audio in
 30-50m IR Distance
 DC12V/PoE
 217.8 × 80.5 × 80.3mm



TD-9453E3B

Motorized Varifocal: 2.8-12mm/7-22mm
 1CH RJ45 Ethernet
 1CH alarm in
 1CH alarm out
 1CH audio in
 1CH audio out
 1CH CVBS out
 50-70m,70-100m IR Distance
 DC12V/PoE
 278.3 × 100.2 × 88.7 mm

■ NETWORK CAMERA



TD-9553E3B

Motorized Varifocal: 2.8-12mm
 1CH RJ45 Ethernet
 1CH alarm in
 1CH alarm out
 1CH audio in
 1CH audio out
 1CH built-in MIC
 1CH CVBS out
 30-50m IR Distance
 DC12V/PoE
 φ141×100.2mm



TD-9554E3B

Fixed lens: 2.8mm,3.6mm
 1CH RJ45 Ethernet
 1CH audio in
 1CH build-in MIC
 20-30m IR Distance
 DC12V/PoE
 φ94.6×82.8 mm



TD-9555E3B

Motorized Varifocal :2.8-12mm
 1CH RJ45 Ethernet
 1CH audio in
 1CH build-in MIC
 30-50m IR Distance
 DC12V/PoE
 φ111.5×99.6 mm



TD-9557E3B

Fixed lens: 2.8mm,3.6mm
 1CH RJ45 Ethernet
 1CH audio in
 1CH build-in MIC
 10-20m IR Distance
 DC12V/PoE
 φ 110 × 59.8mm

E3H-4MP

NDAA

H.265 IP Camera

- NOVATEK SoC, NDA A Compliance
- 4MP(2576x1452)@30fps, 1/1.8" starlight CMOS
- Support HFR mode
- Min.illumination(color):0.0009lux@F1.2,AGC ON;0lux with IR
- H.265+ / H.265 / H.264+ / H.264 / MJPEG
- DC-Iris/P-Iris,120dB True WDR,3DNR,BLC,HLC,Defog,NIR,smart IR,ROI coding,image distortion correction,etc
- Support AI functions,such as video structure,perimeter protection,target counting,face detection,exception detection,etc
- Built-in SD card slot,up to 256GB



TD-9342E3H

Lens Mount: CS
 1CH RJ45 Ethernet
 2CH alarm in
 2CH alarm out
 1CH audio in
 1CH audio out
 1CH built-in MIC
 1CH CVBS out
 1CH RS 485
 DC-Iris
 AC24V/DC12V/PoE
 160.8 × 79 × 64mm



TD-9442E3H

Fixed lens: 2.8mm,3.6mm
 1CH RJ45 Ethernet
 1CH audio in
 30-50m IR Distance
 DC12V/PoE
 217.8 × 80.5 × 80.3mm



TD-9443E3H

Motorized varifocal: 2.8-12mm
 1CH RJ45 Ethernet
 1CH alarm in
 1CH alarm out
 1CH audio in
 1CH audio out
 1CH CVBS out
 P-Iris
 50-70m IR Distance
 AC24V/DC12V/PoE
 278.3 × 100.2 × 88.7mm



TD-9541E3H

Fixed lens: 2.8mm,3.6mm
 1CH RJ45 Ethernet
 1CH alarm in
 1CH alarm out
 1CH audio in
 1CH built-in MIC
 20-30m IR Distance
 DC12V/PoE
 φ119×87.8mm

■ NETWORK CAMERA



TD-9543E3H

Motorized varifocal: 2.8-12mm
1CH RJ45 Ethernet
1CH alarm in
1CH alarm out
1CH audio in
1CH audio out
1CH built-in MIC
1CH CVBS out
P-Iris
30-50m IR Distance
AC24V/DC12V/PoE
φ141×100.2mm



TD-9544E3H

Fixed lens: 2.8mm,3,6mm
1CH RJ45 Ethernet
1CH audio in
1CH built-in MIC
20-30m IR Distance
DC12V/PoE
φ94.6×82.8 mm



TD-9545E3H

Motorized varifocal: 2.8-12mm
1CH RJ45 Ethernet
1CH audio in
1CH built-in MIC
DC-Iris
30-50m IR Distance
DC12V/PoE
φ111.5×99.6 mm

E3B-2MP



H.265 IP Camera

- NOVATEK SoC,NDAA Compliance
- 2MP(1920x1080)@30fps, 1/2.8" starlight CMOS
- Min.Illumination:0.0028lux@F1.2,AGC ON;0lux with IR
- H.265+ / H.265 / H.264+ / H.264 / MJPEG
- DC-Iris,120dB True WDR,3DNR,BLC,HLC,smart IR,ROI coding,corridor mode,image distortion correction,etc
- Support AI functions,such as video structure,perimeter protection,target counting,face detection,exception detection,etc
- Built-in SD card slot,up to 256GB



TD-9322E3B

Lens Mount: CS
 1CH RJ45 Ethernet
 2CH alarm in
 2CH alarm out
 1CH audio in
 1CH audio out
 1CH built-in MIC
 1CH CVBS out
 1CH RS 485
 AC24V/DC12V/PoE
 160.8 × 79 × 64mm



TD-9423E3B

Motorized varifocal: 2.8-12mm
 1CH RJ45 Ethernet
 1CH alarm in
 1CH alarm out
 1CH audio in
 1CH audio out
 1CH CVBS out
 50-70m IR Distance
 AC24V/DC12V/PoE
 278.3 × 100.2 × 88.7mm



TD-9523E3B

Motorized varifocal: 2.8-12mm
 1CH RJ45 Ethernet
 1CH alarm in
 1CH alarm out
 1CH audio in
 1CH audio out
 1CH built-in MIC
 1CH CVBS out
 30-50m IR Distance
 AC24V/DC12V/PoE
 ϕ141×100,2mm



TD-9522E3B

Motorized varifocal: 2.8-12mm
 1CH RJ45 Ethernet
 1CH alarm in
 1CH alarm out
 1CH audio in
 1CH audio out
 1CH built-in MIC
 20 ~ 30 m Distance
 DC12V/PoE
 ϕ121.6 × 95.9 mm

S3 SERIES IPC



Cyber Security



Smart IR



VCA



Starlight



H.265



WDR



SD Card



Multiple Resolution



IP67



IK10



CE

FC



PoE

ONVIF



AVIGILON



exacq

From Tevo Security Products

Genetec



S3A-8MP

H.265 IP Camera

- 8MP(3840×2160)@20fps, 1/2.8" CMOS
- H.265+/H.265/H.264+/H.264 coding
- True day/night, 120dB true WDR, 3DNR, BLC, HLC, defog, smart IR, ROI coding, etc
- Built-in SD card slot, up to 256GB
- Intrusion detection, line crossing detection, video blur detection, scene change, etc
- ONVIF, DC12V/PoE
- -30°C~+60°C, less than 95% humidity



TD-9482S3A

Fixed lens: 2.8mm, 3.6mm
 Motorized varifocal: 2.8-12mm
 1CH RJ45 ethernet
 1CH audio in
 30-50m IR Distance
 DC12V/PoE
 217.8×80.5×80.3mm



TD-9483S3A

Motorized varifocal: 2.8-12mm
 1CH RJ45 ethernet
 1CH alarm in
 1CH alarm in
 1CH audio in
 1CH audio in
 1CH CVBS out
 50-70m IR Distance
 DC12V/PoE
 279.5×100.3×88.9mm



TD-9583S3A

Motorized varifocal: 2.8-12mm
 1CH RJ45 ethernet
 1CH alarm in
 1CH alarm in
 1CH audio in
 1CH audio in
 1CH audio out
 1CH built-in MIC
 1CH CVBS out
 30-50m IR Distance
 DC12V/PoE
 φ141×100.2mm



TD-9584S3A

Fixed lens: 2.8mm, 3.6mm
 1CH RJ45 ethernet
 1CH audio in
 1CH built-in MIC
 20-30m IR Distance
 DC12V/PoE
 φ94.6×82.8mm



TD-9585S3A

Motorized varifocal: 2.8-12mm
 1CH RJ45 ethernet
 1CH audio in
 1CH built-in MIC
 30-50m IR Distance
 DC12V/PoE
 φ111.5×99.6mm

NETWORK CAMERA

S3H-2MP

H.265 IP Camera

- 2MP(1920x1080)@30fps, 1/2.8" starlight CMOS
- H.265/H.264/MJPEG
- True day/night, DWDR, 3DNR, BLC, HLC, defog, ROI coding, etc
- Built-in SD card slot, up to 128GB
- Intrusion detection, line crossing detection, video blur detection
- ONVIF, DC12V/PoE
- -30°C~+60°C, less than 95% humidity



TD-9322S3H

Lens Mount: C/CS
1CH RJ45 ethernet
1CH alarm in
1CH alarm out
1CH RS 485
AC24V/DC12V/PoE
138.4×70×60.5mm



TD-9421S3H

Fixed lens: 2.8mm, 3.6mm, 6mm
1CH RJ45 ethernet
1CH audio in
20-30m IR Distance
DC12V/PoE
167.5×74.5×74.5mm



TD-9422S3H

Fixed lens: 2.8mm, 3.6mm, 6mm
Motorized varifocal: 2.8~12mm
Manual varifocal: 2.8~12mm
1CH RJ45 ethernet
1CH audio in
30-50m IR Distance
DC12V/PoE
217.7×80.5×80.5mm



TD-9521S3H

Fixed lens: 2.8mm, 3.6mm
1CH RJ45 ethernet
1CH built-in MIC
1CH audio in
20-30m IR Distance
DC12V/PoE
φ119×87.8mm



TD-9524S3H

Fixed lens: 2.8mm, 3.6mm
1CH RJ45 ethernet
1CH built-in MIC
20-30m IR Distance
DC12V/PoE
φ94.6×82.8mm



TD-9525S3H

Motorized varifocal: 2.8~12mm
Manual varifocal: 2.8~12mm
1CH RJ45 ethernet
1CH built-in MIC
30-50m IR Distance
DC12V/PoE
φ111.5×99.6mm

S3-8MP



H.265 IP Camera

- NDA4 compliance
- 8MP(3840x2160)@20fps,1/2.7" CMOS
- Min.illumination:0.032lux@F1.2,AGC ON;0lux with IR
- H.265/H.264
- DWDR,3DNR,BLC,HLC,Defog,ROI coding,etc
- Region intrusion detection,line crossing detection,scene change detection,etc
- Built-in SD card slot,up to 128GB



TD-9481S3

Fixed lens: 2.8mm,3.6mm
 1CH RJ45 ethernet
 1CH audio in
 20-30m IR Distance
 DC12V/PoE
 167.5 × 74.5 × 74.5mm



TD-9482S3

Fixed lens: 2.8mm,3.6mm
 Motorized varifocal:2.8-12mm
 1CH RJ45 ethernet
 1CH audio in
 30-50m IR Distance
 DC12V/PoE
 217.7 × 80.5 × 80.5mm



TD-9483S3

Motorized varifocal: 2.8-12mm
 1CH RJ45 ethernet
 1CH alarm in
 1CH alarm out
 1CH audio in
 1CH audio out
 50-70m IR Distance
 DC12V/PoE
 279.5 × 100.3 × 88.9mm



TD-9581S3

Fixed lens: 2.8mm,3.6mm
 1CH RJ45 ethernet
 1CH audio in
 1CH built-in MIC
 20-30m IR Distance
 DC12V/PoE
 φ 119 × 87.8mm

NETWORK CAMERA



TD-9583S3

Motorized varifocal:2,8-12mm
1CH RJ45 ethernet
1CH alarm in
1CH alarm out
1CH audio in
1CH audio out
30-50m IR Distance
DC12V/PoE
φ141 × 100,2 mm



TD-9584S3

Fixed lens:2,8mm,3,6mm
1CH RJ45 ethernet
1CH audio in
1CH built-in MIC
20-30m IR Distance
DC12V/PoE
φ 94,6 × 82,8mm



TD-9585S3

Motorized varifocal:2,8-12mm,
1CH RJ45 ethernet
1CH audio in
1CH built-in MIC
30-50m IR Distance
DC12V/PoE
φ 111,5 × 99,6mm

S3A-5MP

NDA

H.265 IP Camera

- NDA compliance
- 5MP(2592x1944)@20fps,1/2.7" CMOS
- Min.illumination:0.0085lux@F1.2,AGC ON;0lux with IR
- H.265/H.264
- DWDR,3DNR,BLC,HLC,Defog,ROI coding,etc
- Object removal detection,intrusion detection,line crossing detection,scene change detection,etc
- Built-in SD card slot,up to 128GB



TD-9554S3A

Fixed lens: 2.8mm,3.6mm
1CH RJ45 ethernet
1CH built-in MIC
20-30m IR Distance
DC12V/PoE
φ94.6 × 82.8mm



TD-9555S3A

Motorized varifocal:2.8-12mm
1CH RJ45 ethernet
1CH built-in MIC
30-50m IR Distance
DC12V/PoE
φ111.5 × 99.6mm



TD-9451S3A

Fixed lens:v2.8mm,3.6mm
1CH RJ45 ethernet
20-30m IR Distance
DC12V/PoE
167.5 × 74.5 × 74.5mm



TD-9452S3A

Fixed lens: 2.8mm,3.6mm,6mm
Manual varifocus:2.8-12mm
Motorized varifocal:2.8-12mm
1CH RJ45 ethernet
30-50m IR Distance
DC12V/PoE
217.7 × 80.5 × 80.5mm



TD-9551S3A

Fixed lens:2.8mm,3.6mm
1CH RJ45 ethernet
20-30m IR Distance
DC12V/PoE
φ 119 × 87.8mm



TD-9553S3A

Motorized varifocal:2.8-12mm
1CH RJ45 ethernet
30-50m IR Distance
DC12V/PoE
φ141 × 100.2mm

NETWORK CAMERA

S3-4MP

NDAA

H.265 IP Camera

- NDAA compliance
- 4MP(2560x1440)@30fps,1/2.7" CMOS
- Min.illumination:0.01lux@F1.2,AGC ON;0lux with IR
- H.265/H.264
- DWDR,3DNR,BLC,HLC,Defog,ROI coding,etc
- Object removal detection,intrusion detection,line crossing detection,scene change detection,etc
- Built-in SD card slot,up to 128GB(except S3L series)

S3-IPC



TD-9441S3

Fixed lens:2.8mm,3.6mm
1CH RJ45 ethernet
20-30m IR distance
DC12V/PoE
167.5 × 74.5 × 74.5mm



TD-9442S3

Fixed lens: 2.8mm,3.6mm,6mm
Manual varifocal: 2.8-12mm
Motorized varifocal: 2.8-12mm
1CH RJ45 ethernet
30-50m IR distance
DC12V/PoE
217.7 × 80.5 × 80.5mm



TD-9541S3

Fixed lens:2.8mm,3.6mm
1CH RJ45 ethernet
20-30m IR distance
DC12V/PoE
φ117.0 × 90.0mm



TD-9544S3

Fixed lens: 2.8mm,3.6mm
1CH RJ45 ethernet
1CH built-in MIC
20-30m IR distance
DC12V/PoE
φ94.6 × 82.8mm

■ NETWORK CAMERA



TD-9545S3

Motorized varifocal:2.8-12mm
1CH RJ45 ethernet
1CH built-in MIC
30-50m IR distance
DC12V/PoE
φ111.5 × 99.6mm



TD-9441S3L

Fixed lens:2.8 mm,3.6 mm
1CH RJ45 ethernet
10-20m IR Distance
DC12V/PoE
162.1 × 74.8 × 73.8 mm



TD-9544S3L

Fixed lens:2.8 mm,3.6 mm,6 mm
1CH RJ45 ethernet
1CH built-in MIC
10-20m IR Distance
DC12V(PoE power supply optional)
φ 94.8 × 82.8 mm

NETWORK CAMERA

S3B-2MP

NDA A

H.265 IP Camera

- NDA A compliance
- 2MP(1920x1080)@30fps,1/2.8" CMOS
- Min.illumination:
S3B : 0.0035lux@F1.2,AGC ON;0lux with IR
S3BL : 0.0126lux@F1.2,AGC ON;0lux with IR
- H.265/H.264
- DWDR,3DNR,BLC,HLC,Defog,ROI coding,etc
- Intrusion detection,line crossing detection,scene change detection,etc
- Built-in SD card slot,up to 128GB(except S3L series)



TD-9421S3BL

Fixed lens :2.8mm,3.6mm
1CH RJ45 ethernet
10 ~ 20m IR Distance
DC12V/PoE
162.1 × 74.8 × 73.8 mm



TD-9524S3BL

Fixed lens :2.8mm,3.6mm
1CH RJ45 ethernet
1CH built-in MIC
10 ~ 20m IR Distance
DC12V(PoE power supply optional)
φ 94.8 × 82.8 mm



TD-9421S3B

Fixed lens:2.8mm,3.6mm
1CH RJ45 ethernet
1CH audio in
20-30m IR Distance
DC12V / PoE
167.5 × 74.5 × 74.5mm



TD-9422S3B

Fixed lens:2.8mm,3.6mm
Manual varifocus:2.8-12mm
1CH RJ45 ethernet
1CH audio in
30-50m IR Distance
DC12V / PoE
217.8 × 80.5 × 80.3mm



TD-9524S3B

Fixed lens: 2.8mm,3.6mm
1CH RJ45 ethernet
1CH built-in MIC
20-30m IR Distance
DC12V(PoE power supply optional)
φ94.6 × 82.8mm



TD-9525S3B

Manual varifocal:2.8-12mm
1CH RJ45 ethernet
1CH built-in MIC
30-50m IR Distance
DC12V(PoE power supply optional)
φ111.5 × 99.6mm

C1 SERIES IPC



Full-Color



F1.0 Super Aperture Lens



Deep Learning Algorithm



video structure



Perimeter protection



Starlight Sensor



BSI Sensor



Warm Lighting



Smart H.265



True WDR



SD Card



IP67



CE

FC



PoE

ONVIF

NETWORK CAMERA

C1-5MP



H.265 IP Camera

- 1/2.7" 5MP(2592x1944@30fps) CMOS
- 24/7 full color imaging
- F1.0 super aperture lens
- True WDR, NIR, 3DNR, HLC, BLC, Defog, ROI, etc
- Deep learning algorithm, video structure, Perimeter protection, Target counting, Face detection, etc
- Smart alarm
- Built-in SD card slot, up to 256GB
- Friendly warm lighting, smart LED

C1H-4MP



H.265 IP Camera

- 1/1.8" 4MP(2560x1440@30fps) CMOS
- 24/7 full color imaging
- Super aperture lens
- True WDR, 3DNR, HLC, BLC, Defog, ROI, etc
- Deep learning algorithm, video structure, Perimeter protection, Target counting, crowd density detection, heat map, face capture, etc
- Smart alarm
- Built-in SD card slot, up to 256GB
- Friendly warm lighting, smart LED



TD-9452C1

Fixed lens: 2.8mm, 3.6mm
1CH RJ45 Ethernet
1CH audio in
20~30m white light range
DC12V/PoE
217.8x80.5x80.3mm



TD-954C1

Fixed lens: 2.8mm, 3.6mm
1CH RJ45 Ethernet
1CH audio in
1CH built-in MIC
20~30m white light range
DC12V/PoE
ø94.6x82.8



TD-9442C1H

Fixed Lens: 2.8mm, 3.6mm
1CH RJ45 Ethernet
1CH audio in
20~30m white light range
DC12V/PoE
217.7x80.5x80.5mm



TD-9545C1H

Fixed Lens: 2.8mm, 3.6mm
1CH RJ45 Ethernet
1CH audio in
1CH built-in MIC
20~30m white light range
DC12V/PoE
ø94.6x82.8mm

■ NETWORK CAMERA

C1-2MP

H.265 IP Camera



- 1/2.8" 2MP(1920x1080P@30fps) CMOS
- 24/7 full color imaging
- F1.0 super aperture lens
- DWDR, 3DNR, HLC, BLC, Defog, ROI, etc
- H.265/H.264/MJPEG
- Built-in SD card slot, up to 128GB
- Line crossing, intrusion detection
- Smart alarm
- Friendly warm lighting



TD-9422C1

Fixed Lens: 2.8mm, 3.6mm
1CH RJ45 Ethernet
1CH audio in
20~30m white light range
DC12V/PoE
217.8x80.5x80.3mm



TD-9524C1

Fixed Lens: 2.8mm, 3.6mm
1CH RJ45 Ethernet
1CH built-in MIC
20~30m white light range
DC12V/PoE
ø94.6x82.8

FULL COLOR

CAMERA

SPECIAL CAMERA

**TD-C12**

H.265/H.264/MJPEG
 2MP(1920x1080)@30fps, 1/2.7" CMOS
 Min.Illumination:0.007lux@F1.2,
 AGC ON;0lux with IR
 True day/night,DWDR,3DNR
 BLC,HLC,defog,ROI coding,etc
 Built-in SD card slot, up to 128GB
 WiFi(IEEE802.11b/g/n)
 10m IR distance
 PIR(100°,7m)
 1CH RJ45 ethernet
 Built-in MIC
 Built-in Speaker
 Reset button
 1CH alarm in
 1CH alarm out
 DC12V/PoE
 130x71.7x71.7mm

**TD-9441S3(D/PE/WF/AR2)**

H.265/H.264
 4MP(2560x1440)@30fps,1/2.7" CMOS
 Min.Illumination:0.011lux@F1.2
 AGC ON;0lux with IR
 DWDR,3DNR,BLC,HLC,defog
 ROI coding
 Object removal detection
 intrusion detect
 line crossing detection
 scene change detection
 Built-in SD card slot, up to 128GB
 WiFi(IEEE802.11b/g/n)
 20~30m IR distance
 1CH RJ45 ethernet
 DC12V/PoE
 167.6x74.7x148.2mm

**TD-1401E**

H.265/H.264/MJPEG
 4MP AHD analog video input
 2MP TVI/AHD analog video input
 Built-in SD card slot, up to 128GB
 COC control,ROI coding
 1CH RJ45 ethernet
 1CH audio in
 1CH audio out
 1CH alarm in
 1CH alarm out
 1CH RS485
 1CH BNC output
 1CH DC12V@500mA output
 DC12V/PoE
 140.0x74.3x29.0mm(WxDxH)

**TD-9821E3(D)**

H.265/H.264/MJPEG
 2MP(1920x1080)@30fps, 1/2.8" CMOS
 Min.Illumination(B/W):0.01lux@F1.2
 120dB true WDR,3DNR
 BLC,HLC,ROI coding,etc
 Built-in SD card slot, up to 128GB
 1CH RJ45 ethernet
 Built-in MIC
 Reset button
 1CH RS485
 DC12
 30.0x30.0x29.5mm

SPEED DOME CAMERA



Deep Learning
Algorithm



Video Structure



Auto Iris



Perimeter Protection



Face Detection



Line Crossing Detection



Smart IR



Smart Tracking



Starlight



Wiper



H.265



SD Card



IP66



Speed Dome

- Satrlight CMOS
- WDR,3DNR,AF,AWB,BLC,HLC, Flip,Mirror,Smart IR,etc
- Smart H.265/H.264 video compression
- Deep-learning engine
- Support face detection and face comparison
- Smart tracking of human/vehicle
- Smart detection and perimeter protection
- Preset/Cruise/Track/Auto scan/Random scan
- Support 3D positioning
- Support schedule task
- Built-in SD card slot,up to 256GB
- Support PoE



TD-8423IS(G4/25M/AR15)

2MP(1920x1080)@30fps 4G Wireless 4 inch AI PTZ
 1/2.8" Sony Starvis CMOS
 25x(f=4.8-120mm)
 Min.Illumination(color):0.005lux@F1.65
 Pan range: 360°endless
 Tilt range: -5°~90°
 150m IR Distance
 1CH RJ45 Ethernet
 1CH audio in,1CH audio out
 1CH alarm in,1CH alarm out
 DC12V
 IP66, -30 C ~+55 C



TD-8423IS / TD-8423IS2

2MP(1920x1080)@30fps 4 inch AI PTZ
 1/2.8" Sony Starvis CMOS
 15x(f=5-75mm)/25x(f=4.8-120mm)
 Min.Illumination(color):0.005lux@F1.65
 Pan range: 360°endless
 Tilt range: -5°~90°
 150m IR Distance
 1CH RJ45 Ethernet
 DC12V/PoE+
 IP66, -30 C ~+55 C



TD-8443IS / TD-8443IS2

4MP (2560x1440)@30fps 4 inch AI PTZ
 1/2.5" Aptina Starlight CMOS
 25x(f=4.8-120mm)
 Min.Illumination(color):0.01lux@F1.65
 Pan range: 360°endless
 Tilt range: -5°~90°
 100m IR Distance
 1CH RJ45 Ethernet
 DC12V/PoE+
 IP66, -30 C ~+55 C



TD-8523IE / TD-8523IE2

2MP(1920x1080)@30fps 5 inch AI PTZ
 1/2.8" Sony Starvis CMOS
 25x(f=4.8-120mm)/ 32x(f=4.8-153mm)
 Min.Illumination(color):0.005lux@F1.6
 Pan range: 360°endless
 Tilt range: -3°~90°
 150m/200m IR Distance
 1CH RJ45 Ethernet
 1CH audio in,1CH audio out
 1CH alarm in,1CH alarm out
 DC24V/AC24V/PoE+
 IP66, -30 C ~+60 C



TD-8543IE / TD-8543E2

4MP(2560x1440)@30fps 5 inch AI PTZ
 1/2.5" Starvis CMOS
 25x(f=4.8-120mm)/ 30x(f=4.7-141mm)/32x(f=4.8-153mm)
 Min.Illumination(color):0.01lux@F1.65
 Pan range: 360°endless
 Tilt range: -3°~90°
 100m/150m IR Distance
 1CH RJ45 Ethernet
 1CH audio in,1CH audio out
 1CH alarm in,1CH alarm out
 DC24V/AC24V/PoE+
 IP66, -30 C ~+60 C



TD-8620IE

2MP(1920x1080)@30fps 6 inch NoIR PTZ
 1/2.8" Starvis CMOS
 32x(f=4.5-144mm)
 Min.Illumination(color):0.005lux@F1.6
 Pan range: 360°endless
 Tilt range: -20°~160°(auto flip)
 1CH RJ45 Ethernet
 1CH audio in,1CH audio out
 2CH alarm in,1CH alarm out
 AC24V/PoE+
 IP66, -30 C ~+60 C



TD-8623IE

2MP(1920x1080)@30fps 6 inch AI PTZ
 1/2.8" Starvis CMOS
 32x(f=4.5-144mm)
 Min.Illumination(color):0.005lux@F1.6
 Pan range: 360°endless
 Tilt range: -20°~160°(auto flip)
 200m IR Distance
 1CH RJ45 Ethernet
 1CH audio in,1CH audio out
 2CH alarm in,2CH alarm out
 1CH CVBS,1CH RS485
 DC24V/AC24V/PoE++
 IP67, -40 C ~+65 C



TD-8623IE

2MP(1920x1080)@30fps 6 inch Alarm PTZ
 1/2.8" Starvis CMOS
 32x(f=4.5-144mm)
 Min.Illumination(color):0.005lux@F1.6
 Pan range: 360°endless
 Tilt range: -20°~160°(auto flip)
 200m IR Distance, 30m white strobe
 1CH RJ45 Ethernet
 1CH audio in,1CH audio out, built-in speaker(3W) x1
 2CH alarm in,2CH alarm out
 1CH CVBS,1CH RS485
 DC24V/AC24V/PoE++
 IP66, -40 C ~+65 C



TD-8623IM

2MP(1920x1080)@30fps 6 inch AI PTZ
 1/1.8" Super Starvis CMOS
 32x(f=5.6-179.2mm)
 Min.Illumination(color):0.002lux@F1.5
 Pan range: 360°endless
 Tilt range: -20°~160°(auto flip)
 200m IR Distance
 1CH RJ45 Ethernet
 1CH audio in,1CH audio out
 2CH alarm in,2CH alarm out
 1CH CVBS,1CH RS485
 DC24V/AC24V/PoE++
 IP67, -40 C ~+65 C



TD-8623IM

2MP(1920x1080)@30fps 6 inch Alarm PTZ
 1/1.8" Super Starvis CMOS
 32x(f=5.6-179.2mm)
 Min.Illumination(color):0.002lux@F1.5
 Pan range: 360°endless
 Tilt range: -20°~160°(auto flip)
 200m IR Distance, 30m white strobe
 1CH RJ45 Ethernet
 1CH audio in,1CH audio out, built-in speaker(3W) x1
 2CH alarm in,2CH alarm out
 1CH CVBS,1CH RS485
 DC24V/AC24V/PoE++
 IP66, -40 C ~+65 C

SPEED DOME



TD-8640IE

4MP(2560x1440)@30fps 6 inch NoIR PTZ
1/2.5" Starvis CMOS
32x(f=4.5-141mm)
Min.Illumination(color):0.01lux@F1.65
Pan range: 360°endless
Tilt range: -3°~90°
1CH RJ45 Ethernet
1CH audio in,1CH audio out
2CH alarm in,1CH alarm out
AC24V/PoE+
IP66, -30 C ~+60 C



TD-8643IM

4MP(2560x1440)@30fps 6 inch AI PTZ
1/1.8" Starvis CMOS
32x(f=5.6-179.2mm)
Min.Illumination(color):0.005lux@F1.5
Pan range: 360°endless
Tilt range: -20°~160°(auto flip)
200m IR Distance
1CH RJ45 Ethernet
1CH audio in,1CH audio out
2CH alarm in,2CH alarm out
1CH CVBS,1CH RS485
DC24V/AC24V/PoE++
IP67, -40 C ~+65 C



TD-8643IM

4MP(2560x1440)@30fps 6 inch Alarm PTZ
1/1.8" Starvis CMOS
32x(f=5.6-179.2mm)
Min.Illumination(color):0.005lux@F1.5
Pan range: 360°endless
Tilt range: -20°~160°(auto flip)
200m IR Distance, 30m white strobe
1CH RJ45 Ethernet
1CH audio in,1CH audio out, built-in speaker(3W) x1
2CH alarm in,2CH alarm out
1CH CVBS,1CH RS485
DC24V/AC24V/PoE++
IP66, -40 C ~+65 C



TD-8683IM

8MP(3840x2160)@30fps 6 inch AI PTZ
1/1.8" Super Starvis CMOS
32x(f=5.6-179.2mm)
Min.Illumination(color):0.01lux@F1.5
Pan range: 360°endless
Tilt range: -20°~160°(auto flip)
200m IR Distance
1CH RJ45 Ethernet
1CH audio in,1CH audio out
2CH alarm in,2CH alarm out
1CH CVBS,1CH RS485
DC24V/AC24V/PoE++
IP67, -40 C ~+65 C



TD-8823IM

2MP(1920x1080)@30fps 8 inch Laser PTZ
1/1.8" Super Starvis CMOS
37x(f=5.6-202mm)
Min.Illumination(color):0.002lux@F1.5
Pan range: 360°endless
Tilt range: -20°~160°(auto flip)
500m zoomed VCSEL IR Distance
1CH RJ45 Ethernet
1CH audio in,1CH audio out
7CH alarm in,2CH alarm out
1CH CVBS,1CH RS485
DC24V/AC24V/PoE++
IP67, -40 C ~+65 C, Wiper



TD-8823IM

2MP(1920x1080)@30fps 8 inch IR PTZ
1/1.8" Super Starvis CMOS
37x(f=5.6-202mm)
Min.Illumination(color):0.002lux@F1.5
Pan range: 360°endless
Tilt range: -20°~160°(auto flip)
300m IR Distance
1CH RJ45 Ethernet
1CH audio in,1CH audio out
7CH alarm in,2CH alarm out
1CH CVBS,1CH RS485
DC24V/AC24V/PoE++
IP67, -40 C ~+65 C, Wiper



TD-8843IM

4MP(2560x1440)@30fps 8 inch Laser PTZ
 1/1.8" Starvis CMOS
 37x(f=5.6-202mm)
 Min.Illumination(color):0.005lux@F1.5
 Pan range: 360°endless
 Tilt range: -20°~160°(auto flip)
 500m zoomed VCSEL IR Distance
 1CH RJ45 Ethernet
 1CH audio in,1CH audio out
 7CH alarm in,2CH alarm out
 1CH CVBS,1CH RS485
 DC24V/AC24V/PoE++
 IP67,-40 C ~+65 C,Wiper



TD-8843IM

4MP(2560x1440)@30fps 8 inch IR PTZ
 1/1.8" Starvis CMOS
 37x(f=5.6-202mm)/50x(f=6-300mm)
 Min.Illumination(color):0.004lux@F1.4
 Pan range: 360°endless
 Tilt range: -20°~160°(auto flip)
 300m/800m IR Distance
 1CH RJ45 Ethernet
 1CH audio in,1CH audio out
 7CH alarm in,2CH alarm out
 1CH CVBS,1CH RS485
 DC24V/AC24V/PoE++
 IP67,-40 C ~+65 C,Wiper



TD-8883IM

8MP(3840x2160)@30fps 8 inch Laser PTZ
 1/1.8" Starvis CMOS
 37x(f=5.6-202mm)
 Min.Illumination(color):0.01lux@F1.5
 Pan range: 360°endless
 Tilt range: -20°~160°(auto flip)
 500m zoomed VCSEL IR Distance
 1CH RJ45 Ethernet
 1CH audio in,1CH audio out
 7CH alarm in,2CH alarm out
 1CH CVBS,1CH RS485
 DC24V/AC24V/PoE++
 IP67,-40 C ~+65 C,Wiper



TD-8883IM

8MP(3840x2160)@30fps 8 inch IR PTZ
 1/1.8" Starvis CMOS
 37x(f=5.6-202mm)/ 50x(f=6-300mm)
 Min.Illumination(color):0.01lux@F1.5
 Pan range: 360°endless
 Tilt range: -20°~160°(auto flip)
 500m IR Distance
 1CH RJ45 Ethernet
 1CH audio in,1CH audio out
 7CH alarm in,2CH alarm out
 1CH CVBS,1CH RS485
 DC24V/AC24V/PoE++
 IP67,-40 C ~+65 C,Wiper

SPEED DOME

SPEED DOME

NDA



TD-8423IS2N

2MP(1920x1080)@30fps 4 inch PTZ
1/2.8" Sony Starvis CMOS
25x(f=4.8-120mm)
Min.Illumination(color):0.005lux@F1.65
Pan range: 360°endless
Tilt range: -5°~90°
150m IR Distance
1CH RJ45 Ethernet
DC12V/ PoE+
IP66, -30 C ~+55 C

NDA



TD-8443IS2N

4MP(2560x1440)@30fps 4 inch PTZ
1/2.5" Aptina Starlight CMOS
25x(f=4.8-120mm)
Min.Illumination(color):0.01lux@F1.65
Pan range: 360°endless
Tilt range: -5°~90°
100m IR Distance
1CH RJ45 Ethernet
DC12V/ PoE+
IP66, -30 C ~+55 C

NDA



TD-8523IE2N

2MP(1920x1080)@30fps 5 inch PTZ
1/2.8" Sony Starvis CMOS
25x(f=4.8-120mm)
Min.Illumination(color):0.005lux@F1.65
Pan range: 360°endless
Tilt range: -3°~90°
150m IR Distance
1CH RJ45 Ethernet
1CH audio in,1CH audio out
1CH alarm in,1CH alarm out
AC24/DC24V/ PoE+
IP66, -30 C ~+55 C

NDA



TD-8543IE2N

4MP(2560x1440)@30fps 5 inch PTZ
1/2.5" Aptina Starlight CMOS
30x(f=4.7-141mm)
Min.Illumination(color):0.01lux@F1.65
Pan range: 360°endless
Tilt range: -3°~90°
100m IR Distance
1CH RJ45 Ethernet
1CH audio in,1CH audio out
1CH alarm in,1CH alarm out
AC24/DC24V/ PoE+
IP66, -30 C ~+55 C

PANORAMIC CAMERA



Deep Learning
Algorithm



Panoramic Image



ePTZ



Perimeter Protection



Face Recognition



Privacy Mask



Smart IR



Cyber Security



Starlight



WDR



H.265



IK10



SD Card



IP67



■ PANORAMIC CAMERA

M3-Series

multi-sensor



TD-6528M3

1/2.8" starlight CMOS
Eight 1080P video modules to stitch one
16MP(4096x1800x2)
360° surrounded video stream
Min.Illumination:0.008lux@F2.0,AGC ON,
0Lux with IR
120dB true WDR,3DNR,BLC,HLC,ePTZ, privacy
mask,smart IR,etc
Smart H.265/H.264/MJPEG
Face comparison,face recognition,crowd density
statistics,intrusion detection,line crossing
detection,etc
Built-in SD card slot,up to 256GB

3.3mm@F2.0 x8
1CH 1000Mbps RJ45 ethernet port
1CH audio in
1CH audio out
2CH alarm in
2CH alarm out
1CH RS485
AC24V/DC24V/PoE+(802.3bt,class5)
-40 C ~65 C , 90%HR
φ vt273x180mm



TD-6444M3

1/1.8" starlight CMOS
Four 4MP video modules to stitch one
16MP(5520x2400)
180° panoramic view stream
Min.Illumination:0.008lux@F2.0,AGC ON,
0Lux with IR
DWDR,3DNR,BLC,HLC,ePTZ, privacy mask,
smart IR,etc
Smart H.265/H.264/MJPEG
Face comparison,face recognition,crowd density
statistics,intrusion detection,line crossing
detection,etc
Built-in SD card slot,up to 256GB

4.5mm@F2.0 x4
1CH 1000Mbps RJ45 ethernet port
1CH audio in
1CH audio out
1CH alarm in
1CH alarm out
1CH RS485
DC24V/PoE+(802.3at,class3)
-30 C ~60 C , 90%HR
288.4x159.7x137.7mm



TD-6424M3

1/2.8" starlight CMOS
Four 1080P video modules to stitch one
8MP(4096x1800)
360° panoramic view stream
Min.Illumination:0.008lux@F2.0,AGC ON,
0Lux with IR
DWDR,3DNR,BLC,HLC,privacy mask,smart IR,etc
H.265+ /H.265/H.264+ /H.264/MJPEG
Face comparison,face recognition,intrusion
detection,line crossing detection,etc
Built-in SD card slot,up to 256GB

3.2mm@F2.0 x4
1CH 100Mbps RJ45 ethernet port
1CH audio in
1CH audio out
1CH alarm in
1CH alarm out
1CH RS485
DC12V/PoE(802.3af)
-30 C ~60 C , 90%HR
288.4x159.7x137.7mm

E3-Series

multi-sensor



TD-6324E3

1/2.8" starlight CMOS

One camera contains four 1080P video modules,
one IP address, one cable

Min. Illumination: 0.008lux@F2.0, AGC ON, 0Lux with IR
DWDR, 3DNR, privacy mask, smart IR, etc

Smart H.265/H.264/MJPEG

Face comparison, face recognition, crowd density statistics,
intrusion detection, line crossing detection, etc

Built-in SD card slot, up to 256GB

4.0mm@F2.0 x4

1CH 100Mbps RJ45 ethernet port

1CH audio in

1CH audio out

1CH alarm in

1CH alarm out

AC24V/DC24V/PoE+(802.3at, class4)

-33°C ~ 55°C, 90%HR

φ 273x180mm

ANALOG CAMERA



Full color



COC



Multiple Video
Format Output



PAL/NTSC



OSD



WDR



AWB



BLC



Smart Lighting



Multiple Resolution



Multiple Language



Day&Night



IP67



CE

FC



PoE

ONVIF

AM3

- 1920×1080, up to 1000 TVL resolution
- CMOS progressive scan
- Min.Illumination(Color):0.001lux@F1.2,AGC ON
- AHD/TVI/CVI/CVBS video output
- PAL/NTSC
- Support OSD menu
- Support multiple language
- True day/night, true WDR, 3DNR, AWB, BLC, LSC, HLC Freeze, Mirror, Sharpness, Smart IR, Motion Detection, Privacy Mask, Defect Correction,etc
- Support COC function



TD-7421AM3

Fixed lens: 2.8mm, 3.6mm
20-30m IR Distance
IP 67
DC12V(±15%)
167.5×74.5×74.5mm



TD-7422AM3

Fixed lens: 2.8mm, 3.6mm
Manual Varifocal: 2.8~12mm
Motorized Varifocal 2.8-12mm
30~50 m IR Distance
IP 67
DC12V(±15%)
217.7×80.5×80.5mm



TD-7423AM3

Motorized Varifocal: 2.8-12mm
50~70 m IR Distance
IP 67
DC12V(±15%)
279.5×100.3×88.9mm



TD-7521AM3

Fixed lens: 2.8mm, 3.6mm
10~20 m IR Distance
IP 67&IK10
DC12V(±15%)
φ119×87.8mm



TD-7322AM3

C/CS
DC12V(±15%)
AC24 optional
106.8×79×64mm



TD-7523AM3

Motorized Varifocal: 2.8~12mm
20~30 m IR Distance
IP 67&IK10
DC12V(±15%)
φ141×100.2mm



TD-7524AM3

Fixed lens: 2.8mm, 3.6mm
20~30 m IR Distance
IP 67
DC12V(±15%)
φ108×95.7mm



TD-7525AM3

Motorized Varifocal: 2.8-12mm
Manual Varifocal:2.8-12mm
30~50 m IR Distance
IP 67
DC12V(±15%)
φ111.5×99.6mm

ANALOG CAMERA

AE

- 2MP: 1920×1080, up to 1000 TVL resolution
Min.Illumination(Color):0.005lux@F1.2,AGC ON
- 5MP: 2560×1936, up to 1500 TVL resolution
Min.Illumination(Color):0.01lux@F1.2,AGC ON
- 8MP: 3840×2160, up to 1700 TVL resolution
Min.Illumination(Color):0.01lux@F1.2,AGC ON
- CMOS progressive scan
- AHD/TVI/CVI standard and lossless video output
- PAL/NTSC
- Support OSD menu
- Support multiple language
- True day/night, 3DNR, AWB, BLC, sharpness, Smart IR, image setting, defect correction,etc
- Support COC function



TD-7481AE1

Fixed lens: 2.8, 3.6mm
20~30 m IR Distance
IP 67
DC12V(±10%)
167.5×74.5×74.5mm



TD-7482AE1

Fixed lens: 2.8mm, 3.6mm
Motorized Varifocal: 2.8-12mm
30~50 m IR Distance
IP 67
DC12V(±10%)
217.7×80.5×80.5mm



TD-7483AE1

Motorized Varifocal: 2.8-12mm
50~70 m IR Distance
IP 67
DC12V(±10%)
279.5×100.3×88.9mm



TD-7581AE1

Fixed lens: 2.8, 3.6mm
10~20 m IR Distance
IP 67 & IK10
DC12V(±10%)
φ119×87.8mm



TD-7583AE1

Motorized Varifocal: 2.8-12mm
20~30 m IR Distance
IP 67 & IK10
DC12V(±10%)
φ141×100.2mm



TD-7584AE1

Fixed lens: 2.8mm, 3.6mm
20~30 m IR Distance
IP 67
DC12V(±10%)
φ94.6×82.8mm



TD-7585AE1

Motorized Varifocal: 2.8-12mm
30~50 m IR Distance
IP 67
DC12V(±10%)
φ111.5×99.6mm



TD-7451AE2

Fixed lens: 2.8mm, 3.6mm
20~30 m IR Distance
IP 67
DC12V(±10%)
167.5×74.5×74.5mm



TD-7452AE2

Fixed lens: 2.8mm, 3.6mm, 6mm
Motorized Varifocal: 2.8~12mm
Manual Varifocal: 2.8~12mm
30~50 m IR Distance
IP 67
DC12V(±10%)
217.7×80.5×80.5mm

ANALOG CAMERA

ANALOG CAMI



TD-7453AE2

Motorized Varifocal: 2.8~12mm
50~70 m IR Distance
IP 67
DC12V(±10%)
279.5×100.3×88.9mm



TD-7551AE2

Fixed lens: 2.8mm, 3.6mm
10~20 m IR Distance
IP 67&IK10
DC12V(±10%)
φ119×87.8mm



TD-7553AE2

Motorized Varifocal: 2.8~12mm
20~30 m IR Distance
IP67&IK10
DC12V(±10%)
φ141×100.2mm



TD-7554AE2

Fixed lens: 2.8mm, 3.6mm
20~30 m IR Distance
IP 67
DC12V(±10%)
φ94.6×82.8mm



TD-7555AE2

Motorized Varifocal: 2.8~12mm
30~50 m IR Distance
IP 67
DC12V(±10%)
φ111.5×99.6mm



TD-7421AE3

Fixed lens: 2.8mm
20~30 m IR Distance
IP 67
DC12V(±10%)
167.5×74.5×74.5mm



TD-7422AE3

Fixed lens: 2.8mm
Manual Varifocal:2.8-12mm
30~50 m IR Distance
IP 67
DC12V(±10%)
217.7×80.5×80.5mm



TD-7524AE3

Fixed lens: 2.8mm
20~30 m IR Distance
IP 67
DC12V(±10%)
φ94.6×82.8mm



TD-7524AE3S

Fixed lens: 2.8mm
10-20m IR Distance
IP66
DC12V(±10%)
φ94.6×82.8mm



TD-7525AE3

Manual Varifocal: 2.8~12mm
30-50m IR Distance
IP67
DC12V(±10%)
φ111.5×99.6mm



TD-7421AE3S

Fixed lens: 2.8mm
10-20m IR Distance
IP66
DC12V(±10%)
162×74.8×73.8mm



TD-7422AE3S

Fixed lens: 2.8mm
30-50m IR Distance
IP66
DC12V(±10%)
222×85.7×77.3mm

ANALOG CAMERA

AS

- 2MP: 1920×1080, up to 1000 TVL resolution
- 5MP: 2560×1936, up to 1500 TVL resolution
- 8MP: 3840×2160, up to 1700 TVL resolution
- CMOS progressive scan
- AHD/TVI/CVI standard and lossless video output
- PAL/NTSC
- Support OSD menu
- Support Chinese and English language
- True day/night, DWDR, 2DNR, AWB, BLC, sharpness, IR light, image setting, defect correction, etc
- Support COC function



TD-7481AS1

Fixed lens: 3.6mm
20~30 m IR Distance
IP 67
DC12V(±10%)
167.5×74.5×74.5mm



TD-7584AS1

Fixed lens: 3.6mm
20~30 m IR Distance
IP 67
DC12V(±10%)
φ108×95.7mm



TD-7451AS2

Fixed lens: 3.6mm
20~30 m IR Distance
IP 67
DC12V(±10%)
167.5×74.5×74.5mm



TD-7452AS2

Fixed lens: 3.6mm
30~50 m IR Distance
IP 67
DC12V(±10%)
222×85.7×77.3mm



TD-7554AS2

Fixed lens: 3.6mm
20~30 m IR Distance
IP 67
DC12V(±10%)
φ94.6×82.8mm



TD-7451AS2S

Fixed lens: 3.6mm
10~20 m IR Distance
IP 67
DC12V(±15%)
162.1x 74.8×73.8mm



TD-7554AS2S

Fixed lens: 3.6mm
10~20 m IR Distance
IP 67
DC12V(±15%)
φ94.8×82.8mm



TD-7421AS2

Fixed lens: 2.8mm
20~30m IR Distance
IP 67
DC12V(±10%)
167.5×74.5×74.5mm

ANALOG CAMERA



TD-7422AS2

Fixed lens: 2.8mm
30~50 m IR Distance
IP 66
DC12V(± 10%)
222×85.7×77.3mm



TD-7524AS2

Fixed lens: 2.8mm
20~30 m IR Distance
IP 67
DC12V (± 10%)



TD-7421AS2S

Fixed lens: 2.8mm
10~20 m IR Distance
IP 66
DC12V(± 10%)
162.1x 74.8×73.8mm



TD-7524AS2S

Fixed lens: 2.8mm
10~20 m IR Distance
IP 66
DC12V(± 10%)
φ94.6×82.8mm



TD-7420TS2L

Fixed lens: 2.8mm
10~20 m IR Distance
IP 66
DC12V(± 10%)
φ65×144mm



TD-7420TS2L

Fixed lens: 2.8mm
10~20 m IR Distance
IP 66
DC12V(± 10%)
φ65×144.4mm



TD-7520TS2L

Fixed lens: 2.8mm
10~20 m IR Distance
IP 66
DC12V(± 10%)
φ77.5×67.6mm



TD-7520TS2S

Fixed lens: 2.8mm
10~20 m IR Distance
IP 54
DC12V(± 10%)
φ77.5×67.6mm

ANALOG CAMERA

TM3

Light
Explorer

- 1920×1080, up to 1000 TVL resolution
- CMOS progressive scan
- AHD/TVI/CVI/CVBS video output
- PAL/NTSC
- Support OSD menu
- Support multiple language
- Full Color, DWDR, 2D/3DNR, AWB, BLC, Sharpness, Saturation, Contrast, Smart LED, Image setting, Defect Correction, etc
- Support COC function



TD-7524TM3

Fixed lens: 2.8mm, 3.6mm
20~30 m Distance
IP 67
DC12V(±15%)
φ94.6×82.8mm



TD-7421TM3

Fixed lens: 2.8mm, 3.6mm
20~30 m Distance
IP 67
DC12V(±15%)
165.7×69×69mm

M SERIES NVR



Deep learning
algorithm



Face Track



Face Recognition



RAID



Embedded Linux



two-way audio



GUI



Multi-channel playback



Smart H.265



VCA



POS



12MP IP input



4K display



Dual stream recording



CE

FC



PoE

ONVIF

M SERIES

H.265 NVR

- Embedded Linux
- H265S/H265+/H265/H264
- Friendly GUI, Windows style operation by mouse
- Up to 12MP resolution IP video input
- 4K high definition video output
- Multi-mode recording and multi-channel simultaneous playback
- Dual stream recording
- Support face recognition, face track, etc
- 10,000 face picture database
- Statistics graph of face information
- Support VCA event
- Support POS information overlay on live view and playback
- Support NAT function and QR code scanning by mobile phones
- -15~55 °C, 10%~90% humidity



TD-3516B4-A2

- 16CH IP video input
- 1CH 4K HDMI/1CH 1080P HDMI/1CH 1080P VGA output
- 1CH audio input, 1CH audio output
- 16CH alarm in, 4CH alarm out
- 2CH RJ45 ethernet port
- 4CH SATA, max 10T per HDD, 1CH e-SATA
- 2CH USB2.0, 1CH USB3.0
- 1CH RS485
- ATX 250W
- 440 × 390 × 70mm(W × D × H)



TD-3532B4-A2

- 32CH IP video input
- 1CH 4K HDMI/1CH 1080P HDMI/1CH 1080P VGA output
- 1CH audio input, 1CH audio output
- 16CH alarm in, 4CH alarm out
- 2CH RJ45 ethernet port
- 4CH SATA, max 10T per HDD, 1CH e-SATA
- 2CH USB2.0, 1CH USB3.0
- 1CH RS485
- ATX 250W
- 440 × 390 × 70mm(W × D × H)



TD-3532B8-A2

- 32CH IP video input
- 1CH 4K HDMI/3CH 1080P HDMI/1CH 1080P VGA output
- 1CH audio input, 1CH audio output
- 16CH alarm in, 4CH alarm out
- 2CH RJ45 ethernet port
- 8CH SATA, max 10T per HDD, 1CH e-SATA
- 2CH USB2.0, 1CH USB3.0
- 1CH RS485
- ATX 200W
- 445 × 436 × 90mm(W × D × H)



TD-3564B8-A2

64CH IP video input
 1CH 4K HDMI/3CH 1080P HDMI/1CH 1080P VGA output
 1CH audio input, 1CH audio output
 16CH alarm in, 4CH alarm out
 2CH RJ45 ethernet port
 8CH SATA, max 10T per HDD, 1CH e-SATA
 2CH USB2.0, 1CH USB3.0
 1CH RS485
 ATX 200
 445×436×90mm(WxDxH)



TD-3508B1-8P-A2

8CH IP video input
 1CH 4K HDMI/1CH 1080P HDMI/1CH 1080P VGA output
 1CH audio input, 1CH audio output
 8CH alarm in, 4CH alarm out
 1CH RJ45 ethernet port
 8CH RJ45 PoE Ports, maximum output power 96W
 1CH SATA, max 10T, 1CH e-SATA
 2CH USB2.0, 2CH USB3.0
 1CH RS485
 DC48V/2.5A
 300×249×45mm(WxDxH)

E SERIES NVR



Deep learning
algorithm



Face Track



Face Recognition



RAID



Embedded Linux



two-way audio



GUI



Multi-channel playback



Smart H.265



VCA



POS



12MP IP input



4K display



Dual stream recording



CE

FC



PoE

ONVIF

ONVIF

E SERIES A1

H.265 NVR

- Embedded Linux
- H265S/H265+/H265/H264 coding
- Friendly GUI, Windows style operation by mouse
- Up to 4K resolution IP video input
- 4K high definition video output
- Multi-mode recording and multi-channel simultaneous playback
- Dual stream recording
- Support face detection, face comparison and face track
- Statistics graph of face information
- Quick face recognition: 180 people/minute
- 5000 face picture database
- Support VCA event
- Support POS information overlay on live view and playback
- Support NAT function and QR code scanning by mobile phones
- -10~50 C, 10%~90% humidity



TD-3308B1-A1

8 CH IPC audio input
 1CH 4K HDMI output/1CH 1080P VGA output
 1CH audio input, 1CH audio output
 8CH alarm in, 4CH alarm out
 1CH RJ45 ethernet port
 1CH SATA, max 8T
 1CH USB2.0, 1CH USB3.0
 1CH RS485
 DC12V/2A
 300 × 249 × 45mm (W × D × H)



TD-3308B1N-A1

8CH IP video input
 1CH 4K HDMI/1CH 1080P VGA output
 1CH audio input, 1CH audio output
 8CH alarm in, 4CH alarm out
 2CH RJ45 ethernet port
 1CH SATA, max 10T
 1CH USB2.0, 1CH USB3.0
 1CH RS485
 DC12V/2A
 300 × 249 × 45mm (W × D × H)



TD-3316B2-A1

16CH IP video input
 1CH 4K HDMI/1CH 1080P VGA output
 1CH audio input, 1CH audio output
 8CH alarm in, 4CH alarm out
 1CH RJ45 ethernet port
 2CH SATA, max 8T per HDD
 1CH USB2.0, 1CH USB3.0
 1CH RS485
 DC12V/4A
 380 × 268 × 45mm (W × D × H)



TD-3332B2-A1

32CH IP video input(16CH after enabling AI)
 1CH 4K HDMI/1CH 1080P VGA output
 1CH audio input,1CH audio output
 8CH alarm in,4CH alarm out
 1CH RJ45 ethernet port
 2CH SATA, max 10T per HDD
 1CH USB2.0,1CH USB3.0
 1CH RS485
 DC12V/4A
 380 × 268 × 45mm (W × D × H)



TD-3316B2N-A1

16CH IP video input
 1CH 4K HDMI/1CH 1080P VGA output
 1CH audio input,1CH audio output
 8CH alarm in,4CH alarm out
 2CH RJ45 ethernet port
 2CH SATA, max 10T per HDD
 1CH USB2.0,1CH USB3.0
 1CH RS485
 DC12V/4A
 380 × 268 × 45mm (W × D × H)



TD-3316B4-A1

16CH IP video input
 1CH 4K HDMI/1CH 1080P VGA output
 1CH audio input,1CH audio output
 8CH alarm in,4CH alarm out
 1CH RJ45 ethernet port
 4CH SATA, max 8T per HDD
 1CH USB2.0,1CH USB3.0
 1CH RS485
 AC220V
 440 × 390 × 70 mm(W × D × H)



TD-3332H2-A1

Video Structure,LPR
 Fisheye dewarping
 32CH IP video input
 1CH 4K HDMI/1CH 1080P VGA output
 1CH audio input,1CH audio output
 1CH RJ45 ethernet port
 2CH SATA, max 8T per HDD
 1CH USB2.0,1CH USB3.0
 DC 12V 4A
 380 × 268 × 45mm (W × D × H)



TD-3332H4-A1

Video Structure,LPR
 Fisheye dewarping
 32CH IP video input
 1CH 4K HDMI/1CH 1080P VGA output
 1CH audio input,1CH audio output
 8CH alarm in,4CH alarm out
 1CH RJ45 ethernet port
 4CH SATA, max 8T per HDD
 1CH USB2.0,1CH USB3.0
 1CH RS485
 ATX 250W
 440 × 390 × 70mm (W × D × H)



TD-3332B8-A1

Video Structure,LPR
 Fisheye dewarping
 32CH IP video input
 1CH 4K HDMI 1/1CH 1080P HDMI 2
 1CH 1080P VGA output
 1CH audio input,1CH audio output
 8CH alarm in,4CH alarm out
 2CH RJ45 ethernet port
 8CH SATA, up to 8TB per HDD; E-SATA × 2
 1CH USB2.0,1CH USB3.0
 1CH RS485
 ATX 250W
 445×436×90mm(W×D×H)




TD-3308B1-8P-A1

8CH IP video input
 1CH 4K HDMI/1CH 1080P VGA output
 1CH audio input,1CH audio output
 8CH alarm in,4CH alarm out
 1CH RJ45 ethernet port
 8CH RJ45 PoE Ports,maximum output power 80W
 1CH SATA, max 8T
 1CH USB2.0,1CH USB3.0
 1CH RS485
 DC48V/2.5A
 300 × 249 × 45mm (W × D × H)



TD-3316B2-8P-A1

16CH IP video input
 1CH 4K HDMI/1CH 1080P VGA output
 1CH audio input,1CH audio output
 8CH alarm in,4CH alarm out
 1CH RJ45 ethernet port
 8CH RJ45 PoE Ports,maximum output power 80W
 2CH SATA, max 8T per HDD
 1CH USB2.0,1CH USB3.0
 1CH RS485
 DC48V/2.5A
 380 × 268 × 45mm (W × D × H)



TD-3316B2-16P-A1

16CH IP video input
 1CH 4K HDMI/1CH 1080P VGA output
 1CH audio input,1CH audio output
 8CH alarm in,4CH alarm out
 1CH RJ45 ethernet port
 16CH RJ45 PoE Ports,maximum output power 150W¹
 2CH SATA, max 8T per HDD
 1CH USB2.0,1CH USB3.0
 1CH RS485
 DC48V/3,75A
 380 × 268 × 45mm (W × D × H)



TD-3316B4-16P-A1

16CH IP video input
 1CH 4K HDMI/1CH 1080P VGA output
 1CH audio input,1CH audio output
 8CH alarm in,4CH alarm out
 1CH RJ45 ethernet port
 16CH RJ45 PoE Ports,maximum output power 150W¹
 4CH SATA, max 8T per HDD
 1CH USB2.0,1CH USB3.0
 1CH RS485
 ATX 300W
 440 × 390 × 70mm (W × D × H)



TD-3332H4-16P-A1

Video Structure,LPR
 Fisheye dewarping
 32CH IP video input
 1CH 4K HDMI/1CH 1080P VGA output
 1CH audio input,1CH audio output
 16CH alarm in,4CH alarm out
 1CH RJ45 ethernet port
 16CH RJ45 PoE Ports,maximum output power 150W¹
 4CH SATA, max 8T per HDD
 1CH USB2.0,1CH USB3.0
 1CH RS485
 ATX 292W
 440 × 390 × 70mm (W × D × H)



TD-3532H8-16P-A1

Video Structure,LPR
 Fisheye dewarping
 32CH IP video input
 1CH 4K HDMI/1CH 1080P VGA output
 1CH audio input,1CH audio output
 16CH alarm in,4CH alarm out
 1CH RJ45 ethernet port
 16CH RJ45 PoE Ports,maximum output power 150W¹
 8CH SATA,max 8T per HDD, E-SATA × 1
 1CH USB2.0,1CH USB3.0
 1CH RS485
 ATX 300W
 445x436x90mm(WxDxH)

E SERIES

H.265 NVR

- Embedded Linux
- H265S/H265+/H265/H264 coding
- Friendly GUI, Windows style operation by mouse
- Up to 12MP resolution IP video input
- 4K high definition video output
- Multi-mode recording and multi-channel simultaneous playback
- Dual stream recording
- Support AI function, Video Structure, LPR, etc
- Support fisheye dewarping via Web client and mobile APP
- Support VCA event
- Support POS information overlay on live view and playback
- Support NAT function and QR code scanning by mobile phones
- -10~50 C, 10%~90% humidity



TD-3364B8

- RAID
- 64CH IP video input
 - 1CH 4K HDMI/1CH 1080P HDMI/1CH 1080P VGA output
 - 1CH audio in, 1CH audio out
 - 8CH alarm in, 4CH alarm out
 - 2CH RJ45 ethernet port
 - 2CH USB2.0, 1CH USB3.0
 - 1CH RS485
 - 8CH SATA, up to 8TB; E-SATA × 2
 - ATX 250W
 - 445x436x90mm(WxDxH)



TD-3516H8

- RAID
- 16CH IP video input
 - 1CH 4K HDMI/1CH 1080P HDMI/1CH 1080P VGA output
 - 1CH audio in, 1CH audio out
 - 8CH alarm in, 4CH alarm out
 - 1CH RJ45 ethernet port
 - 2CH USB2.0, 1CH USB3.0
 - 1CH RS485
 - 8CH SATA, up to 8TB; E-SATA × 2
 - ATX 250W
 - 445 × 436 × 90mm (W × D × H)



TD-N064E

- RAID
- 64CH IP video input
 - 1CH 4K HDMI/1CH 1080P HDMI/1CH 1080P VGA output
 - 1CH audio in, 1CH audio out
 - 8CH alarm in, 4CH alarm out
 - 2CH RJ45 ethernet port
 - 2CH USB2.0, 1CH USB3.0
 - 1CH RS485
 - 16CH SATA, max 8T; E-SATA × 1
 - ATX 250W
 - 437 × 483 × 143mm (W × D × H)



TD-N128E

- RAID
- 128CH IP video input
 - 1CH 4K HDMI/1CH 1080P HDMI/1CH 1080P VGA output
 - 1CH audio in, 1CH audio out
 - 8CH alarm in, 4CH alarm out
 - 2CH RJ45 ethernet port
 - 2CH USB2.0, 1CH USB3.0
 - 1CH RS485
 - 16CH SATA, max 8T; E-SATA × 1
 - ATX 250W
 - 437 × 483 × 143mm (W × D × H)

E SERIES A2

H,265 NVR

- Embedded Linux
- H265S/H265+/H265/H264 coding
- Friendly GUI,Windows style operation by mouse
- Up to 12MP resolution IP video input
- 4K high definition video output
- Multi-mode recording and multi-channel simultaneous playback
- Dual stream recording
- Support AI function,video structure,LPR,face recognition,etc
- 10,000 face picture database
- Statistics graph of face information
- Support fisheye dewarping via Web client and mobile APP
- Support VCA event
- Support POS information overlay on live view and playback
- Support NAT function and QR code scanning by mobile phones
- -10~50 °C ,10%~90% humidity



TD-3364B16-A2

- 64CH IP video input
- 1CH 4K HDMI/3CH 1080P HDMI/1CH 1080P VGA output
- 1CH audio in,1CH audio out
- 24CH alarm in,8CH alarm out
- 2CH RJ45 ethernet port
- 2CH USB2.0,1CH USB3.0
- 1CH RS485
- 16CH SATA,max 10T per HDD,E-SATA × 1
- ATX 300W
- 437×483×143mm(WxDxH)



TD-33128B16-A2

- 128CH IP video input
- 1CH 4K HDMI/3CH 1080P HDMI/1CH 1080P VGA output
- 1CH audio in,1CH audio out
- 24CH alarm in,8CH alarm out
- 2CH RJ45 ethernet port
- 2CH USB2.0,1CH USB3.0
- 1CH RS485
- 16CH SATA,max 10T per HDD,E-SATA × 1
- ATX 300W
- 437×483×143mm(WxDxH)



TD-3308H1-A2

- 8CH IP video input
- 1CH 4K HDMI/1CH 1080P HDMI/1CH 1080P VGA output
- 1CH audio in,1CH audio out
- 8CH alarm in,4CH alarm out
- 2CH RJ45 ethernet port
- 2CH USB2.0,1CH USB3.0
- 1CH RS485
- 1CH SATA, max 10T
- DC12V/2A
- 300 × 249 × 45mm (W × D × H)



TD-3316H2-A2

- 16CH IP video input
- 1CH 4K HDMI/1CH 1080P HDMI/1CH 1080P VGA output
- 1CH audio in,1CH audio out
- 8CH alarm in,4CH alarm out
- 2CH RJ45 ethernet port
- 2CH USB2.0,1CH USB3.0
- 1CH RS485
- 2CH SATA, max 10T for each HDD
- DC12V/4A
- 380 × 268 × 45mm(WxDxH)



TD-3332H2-A2

- 32CH IP video input
- 1CH 4K HDMI/1CH 1080P HDMI/1CH 1080P VGA output
- 1CH audio in,1CH audio out
- 8CH alarm in,4CH alarm out
- 2CH RJ45 ethernet port
- 2CH USB2.0,1CH USB3.0
- 1CH RS485
- 2CH SATA, max 10T for each HDD
- DC12V/4A
- 380 × 268 × 45mm(WxDxH)



TD-3316H4-A2

- 16CH IP video input
- 1CH 4K HDMI/1CH 1080P HDMI/1CH 1080P VGA output
- 1CH audio in,1CH audio out
- 16CH alarm in,4CH alarm out
- 2CH RJ45 ethernet port
- 2CH USB2.0,1CH USB3.0
- 1CH RS485
- 4CH SATA,max 10T per HDD
- ATX 250W
- 440 × 390 × 70mm(WxDxH)



TD-3332H4-A2

- 32CH IP video input
- 1CH 4K HDMI/1CH 1080P HDMI/1CH 1080P VGA output
- 1CH audio in,1CH audio out
- 16CH alarm in,4CH alarm out
- 2CH RJ45 ethernet port
- 2CH USB2.0,1CH USB3.0
- 1CH RS485
- 4CH SATA,max 10T per HDD
- ATX 250W
- 440 × 390 × 70mm(WxDxH)



TD-3308H1-8P-A2

- 8CH IP video input
- 1CH 4K HDMI/1CH 1080P HDMI/1CH 1080P VGA output
- 1CH audio in,1CH audio out
- 8CH alarm in,4CH alarm out
- 1CH RJ45 ethernet port
- 2CH USB2.0,1CH USB3.0
- 1CH RS485
- 8CH RJ45 PoE ports,maximum output power 96W
- 1CH SATA, max 10T
- DC48V/2.5A
- 300 × 249 × 45 mm(W × D × H)



TD-3316H2-16P-A2

- 16CH IP video input
- 1CH 4K HDMI/1CH 1080P VGA output
- 1CH audio in,1CH audio out
- 8CH alarm in,4CH alarm out
- 1CH RJ45 ethernet port
- 2CH USB2.0,1CH USB3.0
- 1CH RS485
- 16CH RJ45 PoE ports,maximum output power 150W
- 2CH SATA, max 10T for each HDD
- DC48V/3.75A
- 380 × 268 × 45mm(W × D × H)



TD-3316H4-16P-A2

- | 16CH IP video input
- | 1CH 4K HDMI/1CH 1080P HDMI/1CH 1080P VGA output
- | 1CH audio in,1CH audio out
- | 16CH alarm in,4CH alarm out
- | 2CH RJ45 ethernet port
- | 2CH USB2.0,1CH USB3.0
- | 1CH RS485
- | 16CH RJ45 PoE ports,maximum output power 150W
- | 4CH SATA,max 10T per HDD
- | ATX 300W
- | 440x390x70mm(WxDxH)



TD-3332H4-16P-A2

- | 32CH IP video input
- | 1CH 4K HDMI/1CH 1080P HDMI/1CH 1080P VGA output
- | 1CH audio in,1CH audio out
- | 16CH alarm in,4CH alarm out
- | 2CH RJ45 ethernet port
- | 2CH USB2.0,1CH USB3.0
- | 1CH RS485
- | 16CH RJ45 PoE ports,maximum output power 150W
- | 4CH SATA,max 10T per HDD
- | ATX 300W
- | 440x390x70mm(WxDxH)

S SERIES NVR



Embedded
Linux



NAT



QR code



LPR



two-way
audio



Dual stream
recording



GUI



Multi-channel
playback



Smart H.265



VCA



POS



4K IP input



4K display



CE

FC



PoE

ONVIF

S SERIES

H.265 NVR

- Embedded Linux
- H.265S/H.265+/H.265/H.264 coding
- Friendly GUI, Windows style operation by mouse
- Up to 4K resolution IP video input
- 4K high definition video output
- Multi-mode recording and multi-channel simultaneous playback
- Dual stream recording
- License plate recognition
- Support VCA event
- Support POS information overlay on live view and playback
- Support NAT function and QR code scanning by mobile phones
- Remote control via Web client or CMS
- Multi-user online simultaneously
- -10~50°C, 10%~90% humidity



TD-3104B1

4CH IP video input
 1CH 1080P HDMI output
 1CH 1080P VGA output
 4CH simultaneous playback
 1CH RJ45 ethernet port
 LPR
 1CH SATA2.0, max 8T
 2CH USB2.0
 DC12V/1.5A
 255×222×42mm(W×D×H)



TD-3108B1

8CH IP video input
 1CH 1080P HDMI output
 1CH 1080P VGA output
 8CH simultaneous playback
 1CH RJ45 ethernet port
 LPR
 1CH SATA2.0, max 8T
 2CH USB2.0
 DC12V/1.5A
 255×222×42mm(W×D×H)



TD-3104B1H

4CH IP video input
 1CH 4K HDMI output
 1CH 1080P VGA output
 1CH audio input
 1CH audio output
 4CH simultaneous playback
 1CH RJ45 ethernet port
 LPR
 1CH SATA3.0, max 8T
 2CH USB2.0
 DC12V/1.5A
 300×249×45mm(W×D×H)



TD-3108B1H

8CH IP video input
 1CH 4K HDMI output
 1CH 1080P VGA output
 1CH audio input
 1CH audio output
 8CH simultaneous playback
 1CH RJ45 ethernet port
 LPR
 1CH SATA3.0, max 8T
 2CH USB2.0
 DC12V/1.5A
 300×249×45mm(W×D×H)



TD-3116B1

16CH IP video input
 1CH 4K HDMI output
 1CH 1080P VGA output
 1CH audio input
 1CH audio output
 16CH simultaneous playback
 1CH RJ45 ethernet port
 1CH SATA3.0, max 8T
 2CH USB2.0
 DC 12V/1.5A
 300×249×45mm (W×D×H)



TD-3116B2

16 CH IPC audio input
 1CH 4K HDMI output
 1CH 1080P VGA output
 1CH audio input
 1CH audio output
 16CH simultaneous playback
 1CH RJ45 ethernet port
 LPR
 2CH SATA3.0, max 8T per HDD
 2CH USB2.0
 DC 12V/3A
 380×268×45mm (W×D×H)



TD-3132B2

32 CH IPC audio input
 1CH 4K HDMI output
 1CH 1080P VGA output
 1CH audio input
 1CH audio output
 16CH simultaneous playback
 1CH RJ45 ethernet port
 LPR
 2CH SATA3.0, max 8T per HDD
 2CH USB2.0
 DC 12V/3A
 380×268×45mm (W×D×H)



TD-3132B4

32 CH IPC audio input
 1CH 4K HDMI output
 1CH 1080P VGA output
 1CH audio input
 1CH audio output
 16CH simultaneous playback
 1CH RJ45 ethernet port
 LPR
 4CH SATA3.0, max 8T per HDD
 2CH USB2.0
 ATX 250W
 440×390×70mm (W×D×H)



TD-3104B1-4P

4CH IP video input
 1CH 1080P HDMI output
 1CH 1080P VGA output
 4CH simultaneous playback
 1CH RJ45 ethernet port
 4CH RJ45 PoE Ports, maximum output power 40W
 LPR
 1CH SATA2.0, max 8T
 2CH USB2.0
 DC48V/1.5A
 255x222x42mm(Wx DxH)



TD-3108B1-8P

8CH IP video input
 1CH 1080P HDMI output
 1CH 1080P VGA output
 8CH simultaneous playback
 1CH RJ45 ethernet port
 8CH RJ45 PoE Ports, maximum output power 80W
 LPR
 1CH SATA2.0, max 8T
 2CH USB2.0
 DC48V/2.5A
 255x222x42mm(Wx DxH)



TD-3104B1H-4P

4 CH IP video input
 1CH 4K HDMI output
 1CH 1080P VGA output
 1CH audio input
 1CH audio output
 4CH simultaneous playback
 1CH RJ45 ethernet port
 4CH RJ45 PoE Ports, unlimited
 1CH SATA3.0, max 8T
 2CH USB2.0
 DC 48V/1.25A
 300×249×45mm(W×D×H)



TD-3108B1H-8P

- 8CH IP video input
- 1CH 4K HDMI output
- 1CH 1080P VGA output
- 1CH audio input
- 1CH audio output
- 8CH simultaneous playback
- 1CH RJ45 ethernet port
- 8CH RJ45 PoE Ports, maximum output power 80W
- 1CH SATA3.0, max 8T
- 2CH USB2.0
- DC 48V/2.5A
- 300×249×45mm(W×D×H)



TD-3108B2H-8P

- 8 CH IP video input
- 1CH 4K HDMI output
- 1CH 1080P VGA output
- 1CH audio input
- 1CH audio output
- 8CH simultaneous playback
- 1CH RJ45 ethernet port
- 8CH RJ45 PoE Ports, maximum output power 80W
- 2CH SATA3.0, max 8T per HDD
- 2CH USB2.0
- DC 48V/2.5A
- 380×268×45mm (W×D×H)



TD-3116B2-16P

- 16 CH IP video input
- 1CH 4K HDMI output
- 1CH 1080P VGA output
- 1CH audio input
- 1CH audio output
- 16CH simultaneous playback
- 1CH RJ45 ethernet port
- 16CH RJ45 PoE Ports, maximum output power 150W
- LPR
- 2CH SATA3.0, max 8T per HDD
- 2CH USB2.0
- DC 48V/3.75A
- 380×268×45 mm(W×D×H)

NDAA NVR

- Embedded Linux
- H.265S/H.265+/H.265/H.264 coding
- Friendly GUI, Windows style operation by mouse
- Up to 4K resolution IP video input
- 4K high definition video output
- Multi-mode recording and multi-channel simultaneous playback
- Dual stream recording
- License plate recognition, video structure
- Support VCA event
- Support POS information overlay on live view and playback
- Support NAT function and QR code scanning by mobile phones
- Remote control via Web client or CMS
- Multi-user online simultaneously
- -10~50 C, 10%~90% humidity



TD-3104H1-4P-B1

- 4CH IP video input
- 1CH 4K HDMI output
- 1CH 1080P VGA output
- 1CH audio input
- 1CH audio output
- 4CH simultaneous playback
- 1CH 1000Mbps RJ45 ethernet port
- 4CH RJ45 PoE Ports, maximum output power 48W
- 1CH SATA, max 10T
- 2CH USB2.0
- DC48V/1.25A
- 300×249×45 mm (W×D×H)



TD-3108H1-8P-B1

- 8CH IP video input
- 1CH 4K HDMI output
- 1CH 1080P VGA output
- 1CH audio input
- 1CH audio output
- 8CH simultaneous playback
- 1CH 1000Mbps RJ45 ethernet port
- 8CH RJ45 PoE Ports, maximum output power 96W
- 1CH SATA, max 10T
- 2CH USB2.0
- DC48V/2.5A
- 300×249×45 mm (W×D×H)



TD-3116H2-16P-B1

- 16CH IP video input
- 1CH 4K HDMI output
- 1CH 1080P VGA output
- 1CH audio input
- 1CH audio output
- 16CH simultaneous playback
- 1CH 1000Mbps RJ45 ethernet port
- 16CH RJ45 PoE Ports, maximum output power 150W
- 2CH SATA, max 10T for each HDD
- 2CH USB2.0
- DC48V/3.75A
- 380×268×45mm (W×D×H)

HYBRID DVR



Embedded Linux



NAT



QR code



Smart H,265



two-way audio



4K display



GUI



Multi-channel playback



4K input



4 in 1



CE

FC



PoE

ONVIF

ONVIF

HYBRID DVR

4K NDA



TD-2104NS-HP

TVI/AHD/CVI input:4CH(4K)
IPC input: 2CH(8MP@20fps),up to 6CH
video output:HDMI × 1,VGA × 1,BNC × 1
4CH Playback
SATA× 1, up to 10TB
1CH RJ45
1 CH audio input, 1CH audio output
1CH RS485
2CH USB2.0
DC12V / 1.5A
255 × 222 × 42mm (W × D × H)

4K NDA



TD-2108NS-HP

TVI/AHD/CVI input:8CH(4K)
IPC input: 8CH(8MP@20fps),up to 16CH,
video output:HDMI × 1,VGA × 1,BNC × 1
8CH Playback
SATA× 1, up to 10TB
1CH RJ45
1 CH audio input, 1CH audio output
1CH RS485
2CH USB2.0
DC12V / 3A
255 × 234 × 42mm (W × D × H)

NDA



TD-2004NS-HL

TVI/AHD/CVI input:4CH (1080P)
IPC input: 2CH(2MP@30fps),up to 6CH
video output:HDMI × 1,VGA × 1
4 CH Playback
SATA× 1, up to 8TB
1CH RJ45
1 CH audio input, 1CH audio output
2CH USB2.0
DC12V / 1.5A
255 × 222 × 42mm (W × D × H)

NDA



TD-2008NS-HL

TVI/AHD/CVI input:8CH (1080P)
IPC input: 2CH(5MP@25fps),up to 10CH
video output:HDMI × 1,VGA × 1
8 CH Playback
SATA× 1, up to 8TB
1CH RJ45
1 CH audio input, 1CH audio output
2CH USB2.0
DC12V / 1.5A
255 × 222 × 42 mm(W × D × H)

NDA



TD-2104NS-HC

TVI/AHD/CVI input:4CH (5MP)
IPC input: 2CH(5MP@30fps),up to 6CH
video output:HDMI × 1,VGA × 1,BNC × 1
4CH Playback
SATA × 1, up to 10TB
1CH RJ45
1 CH audio input, 1CH audio output
1CH RS485
2CH USB2.0
DC12V / 1.5A
255 × 222 × 42mm(W × D × H)

NDA



TD-2108NS-HC

TVI/AHD/CVI input:8CH (5MP)
IPC input: 4CH(5MP@30fps),up to 12CH
video output:HDMI × 1,VGA × 1,BNC × 1
8CH Playback
SATA × 1, up to 10TB
1CH RJ45
1 CH audio input, 1CH audio output
1CH RS485
2CH USB2.0
DC12V / 2A
255 × 222 × 42mm(W × D × H)

NDA



TD-2116NS-HC

TVI/AHD/CVI input:16CH (5MP)
IPC input: 8CH(5MP@30fps),up to 16CH
video output:HDMI × 1,VGA × 1,BNC × 1
16CH Playback
SATA × 1, up to 10TB
1CH RJ45
1 CH audio input, 1CH audio output
1CH RS485
2CH USB2.0
DC12V / 3A
255 × 234 × 42 mm(W × D × H)

NDA



TD-2116NS-HL

TVI/AHD/CVI input:16CH (1080P)
IPC input: 2CH(5MP@25fps),up to 18CH
video output:HDMI × 1,VGA × 1,BNC × 1
16CH Playback
SATA× 1, up to 8TB
1CH RJ45
1 CH audio input, 1CH audio output
2CH USB2.0
DC12V / 2A
255 × 234 × 42mm (W × D × H)

4K **NDA4**



TD-2704NS-HP

TVI/AHD/CVI input:4CH(4K)
 IPC input: 2CH(8MP@20fps),up to 6CH
 video output:HDMI × 1,VGA × 1,BNC × 1
 4CH Playback
 SATA× 1, up to 10TB per HDD; E-SATA× 1
 1CH RJ45
 4CH alarm in,1CH alarm out
 4CH audio input, 1CH audio output
 1CH RS485
 2CH USB2.0
 DC12V / 2A
 300 × 249 × 45mm (W × D × H)

4K **NDA4**



TD-2708NE-HP

TVI/AHD/CVI input:8CH(4K)
 IPC input: 8CH(8MP@20fps),up to 16CH
 video output:HDMI × 1,VGA × 1,BNC × 1
 8CH Playback
 SATA× 2, up to 10TB per HDD; E-SATA× 1
 1CH RJ45
 8CH alarm in,2CH alarm out
 8CH audio input, 1CH audio output
 1CH RS485
 1CH USB2.0 ,1CH USB3.0
 DC12V / 4A
 380 × 268 × 45mm (W × D × H)

NDA4



TD-2704NS-HC

TVI/AHD/CVI input:4CH(5MP)
 IPC input: 2CH(5MP@30fps),up to 6CH
 video output:HDMI × 1,VGA × 1,BNC × 1
 4CH Playback
 SATA×1, up to 10TB
 1CH RJ45
 4CH alarm in,1CH alarm out
 4CH audio input, 1CH audio output
 1CH RS485
 2CH USB2.0
 DC12V/2A
 300 × 249 × 45mm (W × D × H)

NDA4



TD-2708NS-HC

TVI/AHD/CVI input:8CH(5MP)
 IPC input: 4CH(5MP@30fps),up to 8CH
 video output:HDMI × 1,VGA × 1,BNC × 1
 8CH Playback
 SATA×1, up to 10TB; E-SATA×1
 1CH RJ45
 8CH alarm in,2CH alarm out
 8CH audio input, 1CH audio output
 1CH RS485
 2CH USB2.0
 DC12V/3A
 300 × 249 × 45mm (W × D × H)

NDA4



TD-2716NE-HC

TVI/AHD/CVI input:16CH(5MP)
 IPC input: 8CH(5MP@30fps),up to 16CH
 video output:HDMI × 1,VGA × 1,BNC × 1
 16CH Playback
 SATA×2, up to 10TB per HDD; E-SATA×1
 1CH RJ45
 16CH alarm in,4CH alarm out
 8CH audio input, 1CH audio output
 1CH RS485
 1CH USB2.0 ,1CH USB3.0
 DC12V/4A
 380 × 268 × 45mm (W × D × H)

HYBRID DVR

4K



TD-2704TS-HP

TVI/AHD/CVI Input:4CH (4K)
 IPC input:2CH(8MP@30fps),up to 6CH
 video output:HDMI × 1,VGA × 1,BNC × 1
 4CH playback
 SATA× 1, up to 8TB per HDD; E-SATA×1
 1CH RJ45
 4CH alarm in,1CH alarm out
 4CH audio input,1CH audio output
 1CH RS485
 2CH USB2.0
 DC12V / 2A
 300 × 249 × 45mm (W × D × H)

4K



TD-2708TE-HP

TVI/AHD/CVI Input:8CH (4K)
 IPC input:8CH(8MP@30fps),up to 16CH
 video output:HDMI × 1,VGA × 1,BNC × 1
 8CH playback
 SATA× 2, up to 8TB per HDD; E-SATA× 1
 1CH RJ45
 8CH alarm in,2CH alarm out
 8CH audio input,1CH audio output
 1CH RS485
 2CH USB2.0
 DC12V / 4A
 380 × 268 × 45mm (W × D × H)

4K



TD-2716TE-HP

TVI/AHD/CVI Input:16CH (4K)
 IP video input:8CH(8MP@30fps),up to 16CH
 video output:HDMI × 1,VGA × 1,BNC × 1
 16CH playback
 SATA× 2, up to 8TB per HDD; E-SATA× 1
 1CH RJ45
 16CH alarm in,4CH alarm out
 8CH audio input,1CH audio output
 1CH RS485
 2CH USB2.0
 DC12V / 4A
 380 × 268 × 45mm (W × D × H)



TD-2704TS-HC

TVI/AHD/CVI Input:4CH(5MP)
 IPC input:2CH(5MP@25fps),up to 6CH
 video output:HDMI × 1,VGA × 1,BNC × 1
 4CH playback
 SATA×1, up to 8TB
 1CH RJ45
 4CH alarm in,1CH alarm out
 4 CH audio input,1CH audio output
 1CH RS485
 2CH USB2.0
 DC12V/2A
 300 × 249 × 45mm (W × D × H)



TD-2708TS-HC

TVI/AHD/CVI Input:8CH(5MP)
 IPC input:4CH(5MP@30fps),up to 12CH
 video output:HDMI × 1,VGA × 1,BNC × 1
 8CH playback
 SATA×1, up to 8TB; E-SATA×1
 1CH RJ45
 8CH alarm in,2CH alarm out
 8 CH audio input,1CH audio output
 1CH RS485
 2CH USB2.0
 DC12V/3A
 300 × 249 × 45mm (W × D × H)



TD-2716TE-HC

TVI/AHD/CVI Input:16CH(5MP)
 IPC input:8CH(5MP@30fps),up to 16CH
 video output:HDMI × 1,VGA × 1,BNC × 1
 16CH playback
 SATA×2, up to 8TB per HDD; E-SATA×1
 1CH RJ45
 16CH alarm in,4CH alarm out
 8 CH audio input,1CH audio output
 1CH RS485
 2CH USB2.0
 DC12V/4A
 380 × 268 × 45mm (W × D × H)



TD-2732TC-HC

TVI/AHD/CVI Input:32CH(5MP)
 IPC input:8CH(5MP@30fps),up to 24CH
 video output:HDMI × 1,VGA × 1,BNC × 1
 16CH playback
 SATA×4, up to 8TB per HDD; E-SATA×1
 1CH RJ45
 16CH alarm in,4CH alarm out
 16CH audio input,1CH audio output
 1CH RS485
 2CH USB2.0
 ATX-250W
 440 × 390 × 70mm (W × D × H)



TD-2732TD-HC

TVI/AHD/CVI Input:32CH(5MP)
 IPC input:8CH(5MP@30fps),up to 24CH
 video output:HDMI × 1,VGA × 1,BNC × 1
 16CH playback
 SATA×8, up to 8TB per HDD; E-SATA×1
 1CH RJ45
 16CH alarm in,4CH alarm out
 16CH audio input,1CH audio output
 1CH RS485
 2CH USB2.0
 ATX-250W
 445 × 436 × 90mm (W × D × H)

4K



TD-2104TS-HP

TVI/AHD/CVI Input:4CH (4K)
IPC input:2CH(8MP@30fps),up to 6CH
video output:HDMI × 1,VGA × 1,BNC × 1
4CH playback
SATA× 1, up to 6TB
1CH RJ45
1 CH audio input, 1CH audio output
1CH RS485
2CH USB2.0
DC12V / 1.5A
255 × 222 × 42 mm(W × D × H)

4K



TD-2108TS-HP

TVI/AHD/CVI Input:8CH(4K)
IPC input:8CH(8MP@30fps),up to 16CH
video output:HDMI × 1,VGA × 1,BNC × 1
8CH playback
SATA× 1, up to 8TB
1CH RJ45
1 CH audio input, 1CH audio output
1CH RS485
2CH USB2.0
DC12V / 2A
255 × 234 × 42 mm(W × D × H)

4K



TD-2116TE-HP

TVI/AHD/CVI Input:16CH(4K)
IPC input:8CH(8MP@30fps),up to 16CH
video output:HDMI × 1,VGA × 1,BNC × 1
16CH playback
SATA× 2, up to 8TB
1CH RJ45
1 CH audio input, 1CH audio output
1CH RS485
2CH USB2.0
DC12V / 4A
380 × 268 × 45mm (W × D × H)



TD-2104TS-HC

TVI/AHD/CVI Input:4CH(5MP)
IPC input:2CH(5MP@25fps),up to 6CH
video output:HDMI × 1,VGA × 1,BNC × 1
4CH playback
SATA × 1, up to 6TB
1CH RJ45
1 CH audio input, 1CH audio output
1CH RS485
2CH USB2.0
DC12V / 1.5A
255 × 222 × 42mm(W × D × H)



TD-2108TS-HC

TVI/AHD/CVI Input:8CH(5MP)
IPC input: 4CH(5MP@30fps),up to 12CH
video output:HDMI × 1,VGA × 1,BNC × 1
8CH playback
SATA × 1, up to 6TB
1CH RJ45
1 CH audio input, 1CH audio output
1CH RS485
2CH USB2.0
DC12V / 2A
255 × 222 × 42mm(W × D × H)



TD-2116TS-HC

TVI/AHD/CVI Input:16CH(5MP)
IPC input:8CH(5MP@30fps),up to 16CH
video output:HDMI × 1,VGA × 1,BNC × 1
16CH playback
SATA × 1, up to 8TB
1CH RJ45
1 CH audio input, 1CH audio output
1CH RS485
2CH USB2.0
DC12V / 3A
255 × 234 × 42mm(W × D × H)



TD-2004TS-HL

TVI/AHD/CVI Input : 4CH(1080P)
IPC input:2CH (3MP@30fps),up to 6CH
video output:HDMI × 1,VGA × 1
4 CH playback
SATA × 1, up to 6TB
1CH RJ45
1 CH audio input, 1CH audio output
2CH USB2.0
DC12V / 1.5A
255 × 222 × 42mm(W × D × H)



TD-2008TS-HL

TVI/AHD/CVI Input: 8CH(1080P)
IPC input:2CH(5MP@25fps),up to 10CH
video output:HDMI × 1,VGA × 1
8CH playback
SATA× 1, up to 6TB
1CH RJ45
1 CH audio input, 1CH audio output
2CH USB2.0
DC12V / 1.5A
255 × 222 × 42 mm(W × D × H)

■ HYBRID DVR



TD-2116TS-HL

TVI/AHD/CVI Input: 16CH(1080P)
IPC input:2CH(5MP@25fps),up to18CH
video output:HDMI × 1,VGA × 1,BNC × 1
16CH playback
SATA× 1, up to 8TB
1CH RJ45
1 CH audio input, 1CH audio output
2CH USB2.0
DC12V /2A
255 × 234 × 42 (W × D × H)

SERVER SERIES



AI



Intel CPU



RAID



LPR



Video Structure



All-in-one



Face Recognition



iKVM



E-map



TV wall



Cyber Security



Dual gigabit
network cards



Expansion slot



Multi-user
management



two-way audio



CE

FC



PoE

ONVIF

ONVIF

■ PLATFORM DEVICE

MANAGEMENT

- High-performance intel hardware platform
- All-in-One simple deployment, preset software
- Support the device access of TVT and other famous manufacturers in the industry
- Adding devices through IP address/IP address segment/domain name/serial number
- TV wall management, support auto-switch plan and auto-switch camera group on TV wall
- Support multi-level images and online E-map
- Support multi-level, multi-area and multi-user permission management
- Support corridor and fisheye modes, support PTZ direction control
- Support AI function, such as face surveillance, face greeting, face attendance, line crossing counting, parking lot management, etc



TD-A300-MTC-E

Maximum 256CH access
 Maximum 4CH@8MP decoding capability
 AI function
 1CH 1000Mbps RJ45 Ethernet port
 1CH HDMI@4K output
 1CH VGA@1080P output
 1CH audio input
 1CH audio output
 4CH USB3.0
 2CH USB2.0
 WiFi (optional)
 154x120x30mm(WxHxD)



TD-A510-MTC-E

Maximum 30,000CH access
 Maximum 256CH decoding capability,
 3CH PCI expansion
 4CH RJ45 Ethernet port
 1CH HDMI output
 1CH VGA output
 2CH audio input
 2CH audio output
 4CH USB3.0
 2CH USB2.0
 1CH DVI
 430x487x44mm(WxHxD)



TD-A510-MTSC-E

Maximum 30,000CH access
 Maximum 256CH decoding capability,
 3CH PCI expansion
 4CH RJ45 Ethernet port
 1CH HDMI output
 1CH VGA output
 2CH audio input
 2CH audio output
 4CH USB3.0
 2CH USB2.0
 1CH DVI
 430x487x44mm(WxHxD)



TD-A510-MS-S

Maximum 30,000CH access
 Maximum 256CH decoding capability,
 3CH PCI expansion
 2CH RJ45 Ethernet port
 1CH VGA output
 4CH USB3.0
 2CH USB2.0
 430x487x44mm(WxHxD)



TD-A608E-S

Maximum 128CH access
 Maximum 2CH@8MP decoding capability,
 2CH 1000Mbps RJ45 Ethernet port
 2CH HDMI@4K output
 1CH VGA@1080P output
 2CH audio input
 2CH audio output
 1CH USB3.0
 2CH USB2.0
 WiFi (optional)
 445x436x90mm(WxHxD)

STREAM MEDIA

- Intel Xeon Processor E3,Cent OS7.4
- All-in-One simple deployment, preset software
- Dual gigabit network cards
- Support the device access of TVT and other famous manufacturers in the industry
- Adding devices through IP address/IP address segment/domain name/serial number
- 880Mbps stream access and transfer per device
- Support standard,widescreen and customized screen display modes



TD-A510-MTS-E

3CH PCI expansion slot
1CH VGA
1CH HDMI
6CH USB
4CH RJ45
1CH DVI
2CH audio in
2CH audio out
430x487x44mm(WxHxD)

■ PLATFORM DEVICE

NETWORK STORAGE-A

- Intel Xeon Processor E3,Cent OS7.4
- All-in-One simple deployment,preset software
- Independent HDD bracket,Dual gigabit network cards
- Support the device access of TVT and other famous manufacturers in the industry
- Adding devices through IP address/IP address segment/domain name/serial number
- TV wall management,support auto-switch plan and auto-switch camera group on TV wall
- Support multi-level images and online E-map
- Support multi-level,multi-area and multi-user permission management
- Independent IPMI interface,supports iKVM
- Provide TPM interface,supports TPM standard security chip
- Monitoring various status of the storage server
- Support corridor and fisheye modes,support PTZ direction control
- Hardware RAID,RAID 0,1,5



TD-A616E-E

16CH 3.5inch SATA
 2CH built-in 2.5inch SATA
 Up to 128TB storage capacity
 2CH PCI expansion slot
 1CH PCE expansion slot
 1CH VGA
 6CH USB
 2CH RJ45
 1CH IPMI
 1CH RS232
 444x670x132mm(WxHxD)



TD-A624E-E

24CH 3.5inch SATA
 2CH built-in 2.5inch SATA
 Up to 192TB storage capacity
 2CH PCI expansion slot
 1CH PCE expansion slot
 1CH VGA
 6CH USB
 2CH RJ45
 1CH IPMI
 1CH RS232
 444x670x177mm(WxHxD)

NETWORK STORAGE-S

- Intel Xeon Processor E3,Cent OS7.4
- Independent HDD bracket,Dual gigabit network cards
- Independent IPMI interface,supports iKVM
- Provide TPM interface,supports TPM standard security chip
- Monitoring various status of the storage server
- Hardware RAID,RAID 0,1,5



TD-S316E-E

16CH 3.5inch SATA
 2CH built-in 2.5inch SATA
 Up to 128TB storage capacity
 2CH PCI expansion slot
 1CH PCE expansion slot
 1CH VGA
 6CH USB
 2CH RJ45
 1CH IPMI
 1CH RS232
 444x670x132mm(WxHxD)



TD-S324E-E

24CH 3.5inch SATA
 2CH built-in 2.5inch SATA
 Up to 192TB storage capacity
 2CH PCI expansion slot
 1CH PCE expansion slot
 1CH VGA
 6CH USB
 2CH RJ45
 1CH IPMI
 1CH RS232
 444x670x177mm(WxHxD)

■ PLATFORM DEVICE

DECODER

HIGH DEFINITION DECODER

- Embedded Linux OS
- H.264/H.265
- Live view and playback decoding
- 1/4/9/16/25/36 screen display mode
- Splicing,window opening,roaming
- Multi-level device control
- Support device search
- View cameras or camera groups in sequence
- Support platform running mode and device running mode
- Dual gigabit Ethernet ports,load balancing

DECODER



TD-1102D

2CH RJ45
2CH HDMI video output
1CH audio in
1CH audio out
8CH alarm in
4CH alarm out
1CH USB3.0
2CH USB2.0
DC12V
380x268x45mm(WxDxH)



TD-1104D

2CH RJ45
1CH HDMI video input
4CH HDMI video output
4CH VGA output
4CH CVBS output
1CH audio in
4CH audio out
8CH alarm in
8CH alarm out
1CH RS485
1CH RS232
1CH USB3.0
1CH USB2.0
DC12V
380x260x45mm(WxDxH)




TD-A130

24CH RJ45
12CH HDMI video input (4K@30fps)
24CH HDMI video output
12CH VGA output
12CH CVBS output
12CH audio input
12CH audio output
96CH alarm input
96CH alarm output
12CH RS485
12CH USB3.0
AC100-240V/3.0A
440x370x267mm(WxDxH)

KEYBOARD

TD-K23

- Android 7.0 OS
- IPS 10.1" touch screen
- Maximum 4 screen display mode
- Display resolution 1280*800
- PTZ/platform working mode
- Up to 1024 devices to be added
- H.264/H.265 decoding
- 4K@30fps HDMI output
- Onvif 2.4
- Support USB mouse
- Support TV wall client control
- 4D joystick

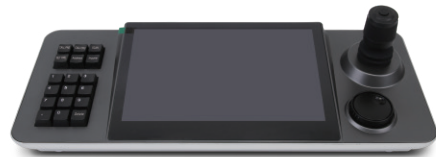

External Interface

1CH RJ45
1CH RS485
1CH RS233
1CH HDMI
1CH USB2.0
1CH 3.5mm headphone jack
445x179x118mm(LxWxH)



External Interface

1CH RJ45
1CH RS485
1CH RS232
420x260x170mm(LxWxH)

TD-K11-W

- LCD display
- multi-language menu
- PTZ/platform working mode
- Support TV wall client control
- 4D joystick