


CAMERA

TD-9443E3

4MP Network IR Water-Proof
Bullet Camera



- 4MP (2592 × 1520) H.265 full real time coding
- Max. resolution: 2592 × 1520
- ICR auto switch, true day / night vision
- Up to 100m IR night view distance; motorized zoom lens
- 3D DNR, true WDR, HLC, BLC, Defog, NIR, Smart IR and ROI coding
- Support image distortion correction
- Built-in micro SD card slot; up to 128GB
- DC12V/PoE power supply
- IP 67 ingress protection
- Support three streams
- P2P function optional
- Support remote monitoring by smart phones & tablet PCs with iOS and Android OS
- Intelligent analytics

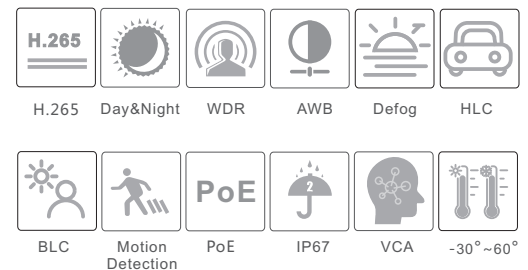

en.tvt.net.cn

For more information, please visit our website

Shenzhen TVT DIGITAL TECHNOLOGY CO., LTD.

Address: 23rd Floor, Block B4, Building NO.9, Shenzhen Bay Eco-Technology Park, Nanshan District, Shenzhen, Guangdong Province, P.R.China

Tel: +86-755-36995888

Web site: <http://en.tvt.net.cn>

Fax: +86-755-33104777

E-mail: overseas@tvt.net.cn


SPECIFICATIONS

Specifications	Model TD-9443E3	
Camera		
Image Sensor	1 / 3 "CMOS	
Image Size	2592 × 1520	
Electronic Shutter	1 / 30 s ~ 1 / 100000 s	
Iris Type	DC Iris	
Min. Illumination	0.005 lux@F1.6,AGC ON; 0 lux with IR 0.0028 lux@F1.2,AGC ON; 0 lux with IR	
Lens	2.8~12mm@F1.4, motorized	7~22mm@F1.6, motorized
Field of View	H: 94.2°~29.8°; V: 62.4°~17°; D: 102°~33.9°	H: 42.5°~16.7°; V: 24.7°~9.4°; D: 48°~19°
Lens Mount	Φ14	
Day & Night	ICR	
Wide Dynamic Range	120dB	
BLC	Yes	
HLC	Yes	
Defog	Yes	
Digital NR	3D DNR	
Angle Adjustment	Pan: 0°~360°; Tilt:0°~90°; Rotation: 0°~360°	
Image		
Video Compression	Smart H.265 / H.265+ / H.265 / Smart H.264 / H.264+ / H.264 / MJPEG	
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile	
Resolution	4MP (2592 × 1520), 2K (2560 × 1440), 3MP (2304 × 1296), 1080P (1920 × 1080), 720P (1280 × 720), D1, CIF, 480 × 240	
Main Stream	4MP/2K/3MP/1080P / 720P (60Hz : 1 ~ 30fps; 50Hz: 1~25fps) HFR mode: 1080P / 720P (60Hz : 1 ~ 60fps; 50Hz: 1~50fps)	
Sub Stream	720P/D1/CIF/480×240 (60Hz : 1 ~ 30fps; 50Hz: 1~25fps)	
Third Stream	D1/CIF/480×240 (60Hz : 1 ~ 30fps; 50Hz: 1~25fps)	
Bit Rate	64 Kbps ~ 8 Mbps	
Bit Rate Type	VBR / CBR	
Audio Compression	G711A / U	
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast,Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser	
ROI	Each ROI to be configured separately	
Interfaces		
Network	RJ45	
Video Output	CVBS output (BNC × 1)	
Audio	1CH audio input; 1CH audio output	
Storage	Built-in micro SD card slot; up to 128GB	
Reset	Yes	
Alarm	1CH alarm input; 1CH alarm output	
Intelligent Analytics (Smart Events)		
Perimeter Protection	Line crossing, region entrance/exiting/intrusion (human/motor vehicle/non-motor vehicle classification)	
Target Counting	Line crossing human/motor vehicle/non-motor vehicle counting	
Exception Detection	Scene change, video blur and video color cast detection	
Face Detection	Face detection and face capture	
General Intelligence	Crowd density detection, heat map, object abandoned/missing detection*	
Functions		
Remote Monitoring	Web browsing,CMS remote control	
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission	
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, SNMP, HTTP, 802.1x, UPnP, HTTPs, QoS	
Interface Protocol	ONVIF	
Storage	Network remote storage; micro SD card storage	
Smart Alarm	Motion detection, sensor detection, SD card error, SD card full, IP address conflict, cable disconnection	

*Grey items are being developed and coming soon.

General Function	Watermark, IP address filtering, video mask, heartbeat, password protection, non-photosensitive switch, image distortion correction	
PoE	Yes , IEEE802.3af	
IR Distance	50 ~ 70 m	70 ~ 100 m
Ingress Protection	IP67	
Others		
Power Supply	DC12V/PoE	
Power Consumption	< 10W	
Operating Environment	- 30 °C ~ 60 °C (-22°F~140°F) Humidity: less than 95 % (non-condensing)	
Dimensions (mm)	279.5 × 100.3 × 88.9	
Weight (net)	Approx. 1.04KG	
Installation	Ceiling mounting; Wall mounting	

DIMENSIONS

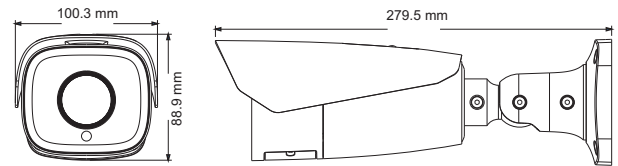

AVAILABLE ACCESSORIES



AVAILABLE MODEL

Available Model	TD-9443E3(D/AZ/PE/AR5)	Motorized lens (2.8~12mm)
	TD-9443E3(D/AZ/PE/AR7)	Motorized lens (7~22mm)