



Secure the word with you

**Mobile Surveillance
User Manual**

Contents

1	Network Configuration	1
	1.1 Access Device via WLAN	1
	1.2 Access Device via 2G/3G/4G/5G Network	1
2	Install APP	2
3	Settings and Applications	2
	3.1 Login	2
	3.2 Live View	3
	3.2.1 Live View Introduction.....	3
	3.2.2 AI View Mode	7
	3.2.3 PTZ Control.....	8
	3.2.4 Adding Favorite Group.....	9
	3.3 Adding Person	9
	3.4 Smart Search.....	10
	3.4.1 Search by Image	10
	3.4.2 Search by Name.....	11
	3.4.3 Search by Event	12
	3.5 Manual Alarm.....	13
	3.6 Voice Alarm.....	14
	3.7 Remote Playback	14
	3.8 Remote Setting	16
	3.9 Local Setting.....	17
	3.10 Server List	18
	3.11 File Management	19
	3.12 Push Setting.....	20
	3.13 Notifications	21
	3.14 Help	22
	3.15 About	23

Mobile Surveillance

SuperCam Plus is a new generation of independent research and development surveillance App based on mobile platform. This App enhances the interfacial design, function integration and technology optimization compared with the last version. Additionally, it is compatible with our new generation of platform NVR.

Main Features:

- Re-designing the interface makes the operation easier and the interface look better.
- The P2P connection makes the connection faster and more stable.
- Support H264/H265 decoding
- Gesture lock makes the surveillance system safer.
- Support push settings and notifications
- The functions of sharing to the third App or platform, including screenshot sharing, device sharing, dropbox sharing, downloading address sharing and Email sharing, help to approach each other anytime and anywhere.
- Support varies of notable features, eg., device preview, multi-channel playback and multiple convenient gesture operations.
- Support PTZ mode, fisheye mode & AI mode preview
- Support search face image by image, by name or by event
- Support face track and body temperature display
- Support multi-device access, including thermal cameras, face recognition and temperature measurement terminals, AI cameras, SMT, DVR, NVR, etc.
-

1 Network Configuration

1.1 Access Device via WLAN

- ① Connect device (IPC/DVR/NVR) via wireless router. Then check DHCP both in router and device to automatically obtain IP address or enter the IP address manually.
- ② Use WIFI function in your mobile phone to connect the wireless router.
- ③ Add the IP address and port of the device or scan the QR CODE of the device to add the device in the mobile phone surveillance client.

Note: Make sure your phone network and device network are in the same network segment on LAN.

1.2 Access Device via 2G/3G/4G/5G Network

- Set the device (IPC/DVR/NVR/SMT/Panel) network. Please go to the network setup interface of the device.
- If you use PPPoE to connect device, please enable PPPoE and enter username and

password received from you ISP in the network interface. Then tap “Apply”. If you want to use dynamic domain name, please apply for a domain name in a DNS server supported by the device.

➤ If you have a static WAN IP address, please go to network setup interface to enter your IP address, gateway and port.

➤ If you use LAN IP address, please go to network setup interface to enter your IP address, gateway and port and then forward IP address and port number in virtual server setup of the router or virtual server (If you has enabled the UPnP function in both the device and router, you can skip this step). Port forwarding setting may be different in different routers and servers. Please refer to the router’s manual for details. After you forward your LAN IP address and port, please check the WAN IP address in the router or server.


● Add the WAN IP address or domain name of the device or scan the QRCODE of the device to add the device in the mobile phone surveillance client.

2 Install APP

This surveillance APP can be searched and installed through iPhone/iPad and Android smartphones.

The installation steps are as follows.


① Run “Google Play” (or “APP Store”) program to search “SuperCamPlus”.

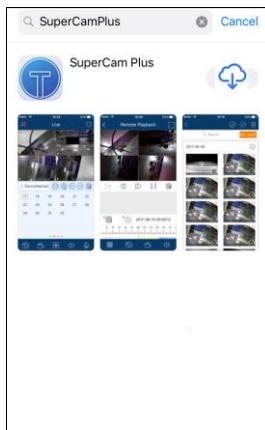

② Follow directions to download and install this APP.

3 Settings and Applications

3.1 Login

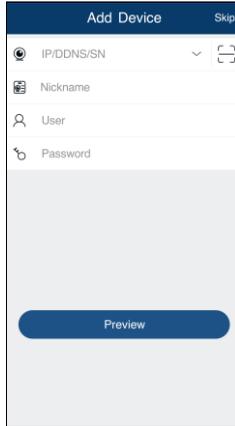

➤ Login by scanning the QR CODE

Tap  to scan the QR CODE of the device through your mobile phone, and then it will automatically obtain serial number and user. After manually inputting nick name and the password, tap “Preview” button to go to the live interface.

Note: If the device and the mobile client are in the different network segment, the device shall support QR CODE and enable the NAT.

➤ Login by domain name or IP Address

- ① Input IP address/domain name, nick name, user and password.
- ② Tap “Preview” to go to the live interface.

Domain name/IP Address: WAN IP address (or domain name) plus HTTP port of the device. For example: 210.21.183:89 or 123.dvrDNS.com:89.

User and Password: The login user and password of the device. The default user name is *admin* and the default password is *123456*.

Note: To search and add the device in the same network segment, tap  button.

3.2 Live View

3.2.1 Live View Introduction

Mobile Surveillance User Manual



Close channel preview: Drag the window to the deletion button to close the channel preview.

Channel preview: Choose a window and tap the channel number to preview the channel.

Device preview: Choose a device name and tap . Then it will play according to the following rules.

- 1) If the channel quantity is less than or equal to the current screen display mode, all channels of the device will be previewed in the current screen display mode.
- 2) If the channel quantity is more than the current screen display mode and the current screen display mode is more than 9, the channel of the device will be previewed in the current screen display mode.
- 3) If the channel quantity is more than the current screen mode and the current screen display mode is less than or equal to 9, it will play as the following rules. a) if the channel quantity is more than or equal to 9, 9 channels of the device will be previewed; b) if the channel quantity is less than 9, all channels of the device will be previewed.

Channel indication light in the live interface.

-  : Initial state.
-  : Sensor alarm/sensor alarm based recording
-  : Manual recording
-  : Intelligence alarm based recording
-  : Motion alarm/motion alarm based recording
-  : Schedule recording

Icons in the live interface

-  : Main menu button; tap it to go to **Remote Setting, Local Setting, Sever List, File** and so on.
-  : Tap it to go to **Server List**.

Mobile Surveillance User Manual



: Tap it to enter the AI view mode.



: Free channel.



: Channel display.



: Tap it to play the previous channel group.



: Tap it to play the next channel group.



: Close all previews.



: Open/close two-way talk.



: Open/close the audio.



: Tap it to choose 1/4/9/16 screen(s) display mode. Tap “More” to choose more screen display modes.



: Tap it to go to the remote playback interface.



: Tap it to view more menus, such as add favorite, manual alarm, etc.





: Snap. Choose the channel and tap it to capture the channel image.




: Open/close the local record.

It will go to the single channel display mode by double tapping one channel. After tapping this single channel, the following icons will be displayed.

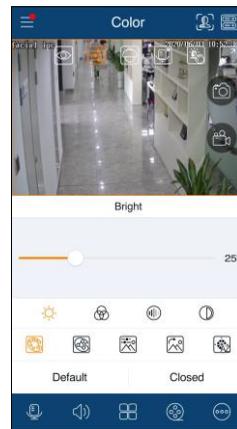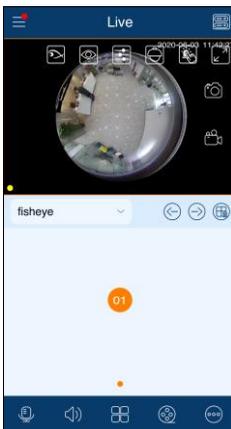


Tap the device name (like “thermal”) to show device name list as shown below. Tap  button to play all channels of this device. Tap “+” button to add new devices.


Mobile Surveillance User Manual

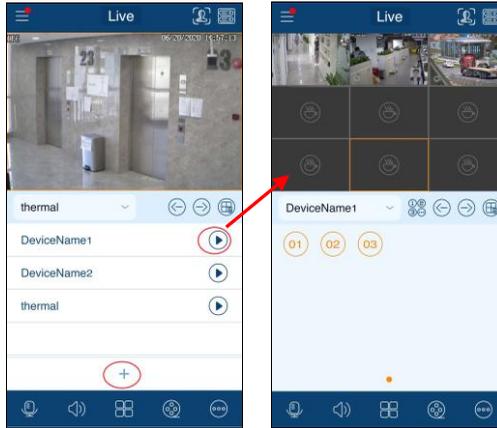

: Fisheye mode. This icon appears only when this channel is a fisheye camera. Tap this icon to go to fisheye display mode as shown below. Different view modes can be selected in this interface.

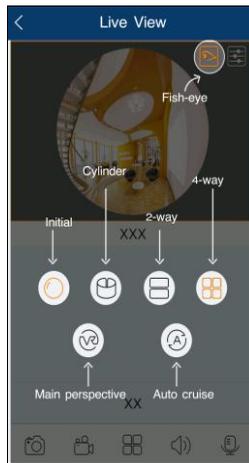

: Tap it to choose the definition of the current image.
: Tap it to adjust the image. The brightness, white balance, sharpness, image mirror and zoom can be set.

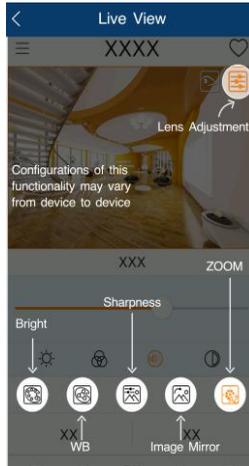

: Zoom adjustment (this function is only available for cameras with motorized lens).




: Tap it to go to PTZ mode. You may control the PTZ by sliding the screen.




: Full screen.

Turn your phone and make the live image display in landscape mode or go to the full screen mode. Then the following icons will be displayed by tapping the current image.

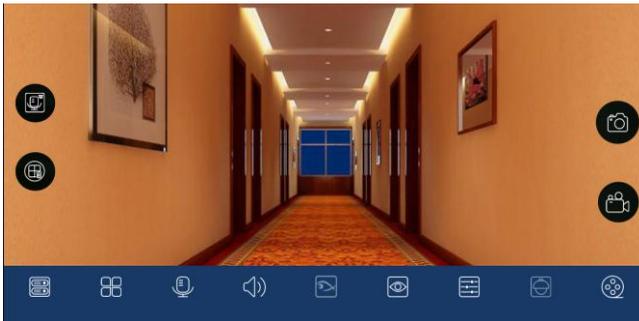

3.2.2 AI View Mode

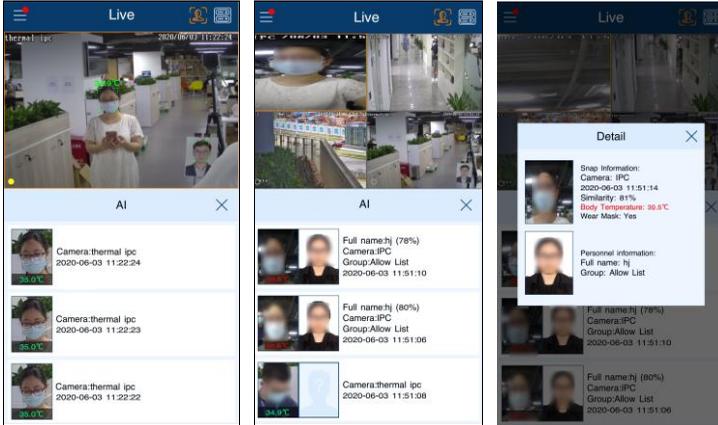


Tap  to enter the AI view mode as shown above. In the above interface, you can view the captured pictures, face match information, body temperature, capture time, etc. If the detected temperature exceeds the pre-defined threshold, the displayed temperature value will turn red.

Tap on the captured picture to view the detailed information. In the detailed information display window, you can view the similarity, mask status, body temperature, capture time, group, etc.

Note: Only the camera or device supports temperature measurement/mask detection/face recognition, can the corresponding information be displayed.

3.2.3 PTZ Control


The added device must support PTZ function, or PTZ mode cannot be enabled. Tap  button to see the following image.

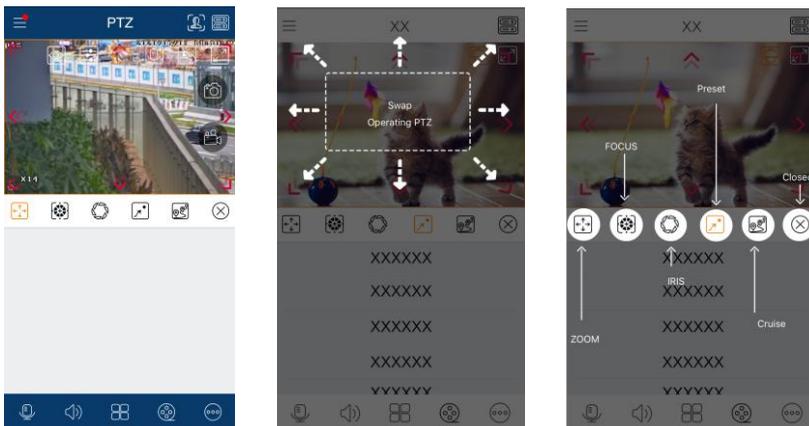

Please control the PTZ by sliding the image in the direction of the arrow marked on the image. The PTZ will automatically focus on the little red circle by tapping on the image. Then the 3D function can be enabled (the added device must be support 3D function, or this function is invalid).

3.2.4 Adding Favorite Group

In the live interface, tap  and then select “Add Favorite” to add favorite group.

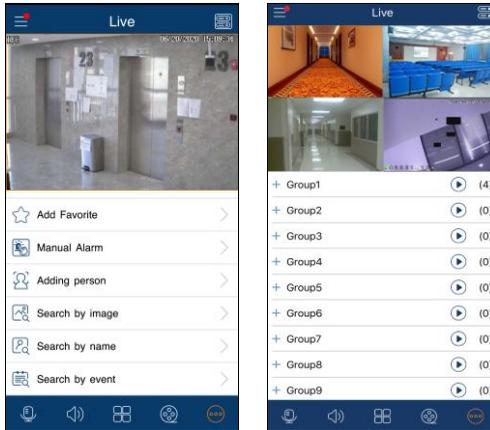


Tap “+” in front of the group name to save the current channels to the favorite group. You can also tap  to select other screen display mode and channels. Then save these channels to the favorite group. Click  to play the favorite channels of the group immediately.

3.3 Adding Person

Only the device with face search function supports the following applications.

1. Adding new members


- ① Tap  and select “Adding person” to go to the following interface.
- ② Take a snapshot of a person or tap  to select a face in your album.
- ③ Fill in the relevant information of the person and save it.

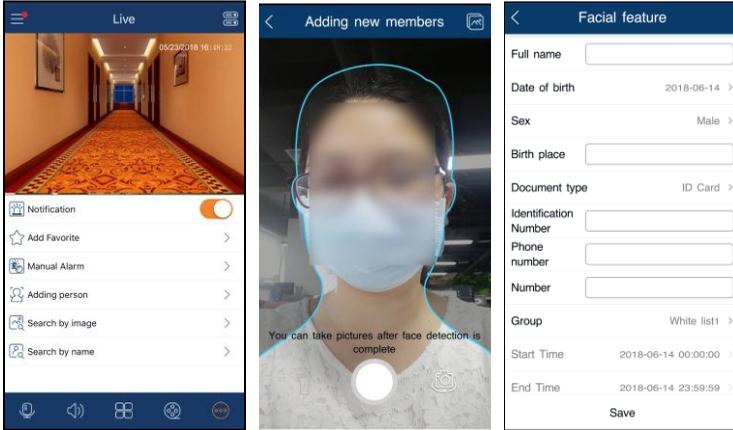

3.4 Smart Search

3.4.1 Search by Image

- ① Select “Search by image”.
- ② Take a photo of a person or tap  to select a face in your album.
- ③ Set the similarity, start and end time.
- ④ Tap “Start Searching” to search the result.

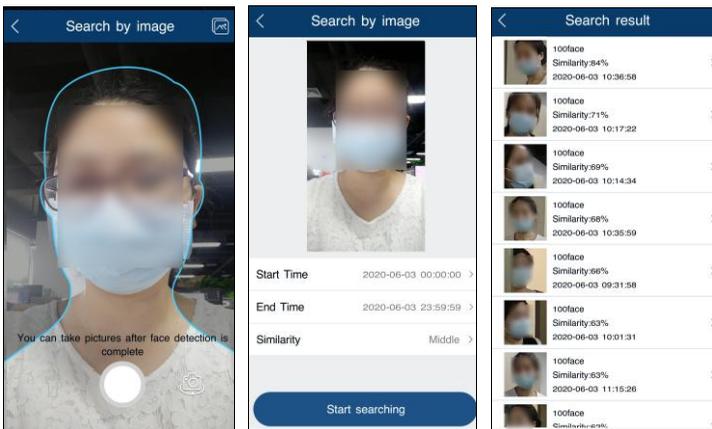


- ⑤ Tap the searched result to view the details, including snapshot time, camera name, face ID and so on.
- ⑥ Tap  in the middle of the image to play the record.




3.4.2 Search by Name

- ① Select “Search by name”.
- ② Select the relevant group and then enter the name you want to search.
- ③ Click the searched name and then choose a face.

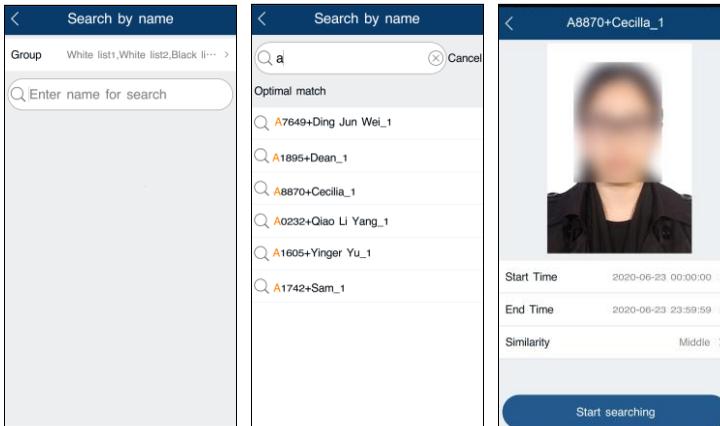


- ④ Set the similarity, start and end time.
- ⑤ Click “Start searching” to search the result.
- ⑥ Click the searched result to view the details, including snapshot time, camera name and so on.
- ⑦ Click  in the middle of the image to play the record.

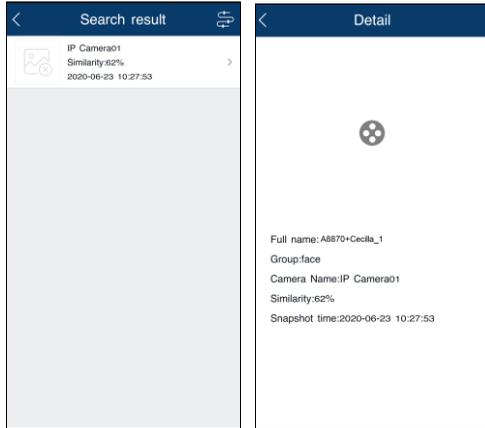

Trace Playback:


Click  to view the target in different places. Click one file and click  button to play the record. Note that the next trace will be automatically played.

Click  to play all trace records automatically.

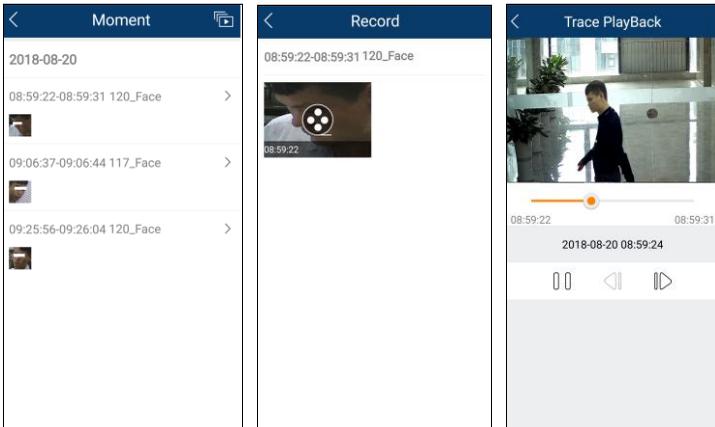

3.4.3 Search by Event


Mobile Surveillance User Manual

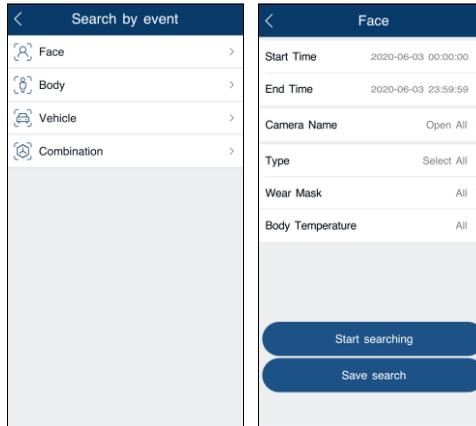

Different devices support different event types. The above pictures are for reference only. The real interface of the device shall prevail.

The APP can support face search, human body search, vehicle search and combination search (depending on devices). Here we take the face search for example.

- ① Set the start time and end time and choose the desired camera, event type, mask status and body temperature status.
- ② Tap “Start Searching” to view the search result as shown below.

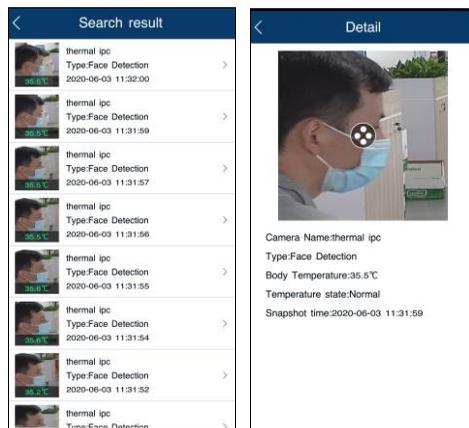

The body temperature, capture time and camera information can be viewed. Tap the searched result to view the detailed information.

3.5 Manual Alarm


Tap “Manual Alarm” to go to the following interface. If your device don't support

alarm out function, please skip the instruction.



Select the desired alarm output and then tap “” to trigger alarm out manually. Tap “” to clear alarm output.

3.6 Voice Alarm

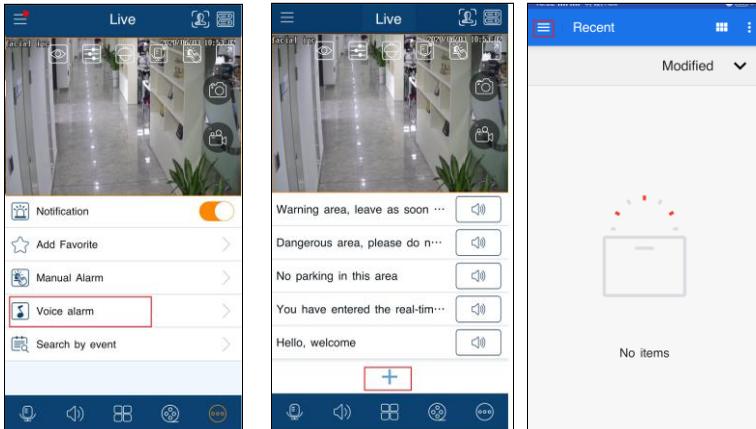


In the live view interface, tap  and then select “Voice Alarm” to enter the voice alarm interface. Tap  and then the camera will automatically sound the warning voice accordingly. Tap “+” to enter the voice adding interface. Tap  to add the local audio.


3.7 Remote Playback

Tap  icon in the live interface to remotely play the record saved in the HDD(s) of

the device.

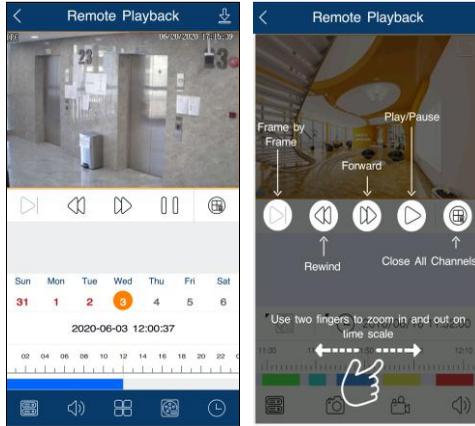


Please control the playback by using the buttons mentioned above. Then turn you phone and make the remote playback display in landscape mode.

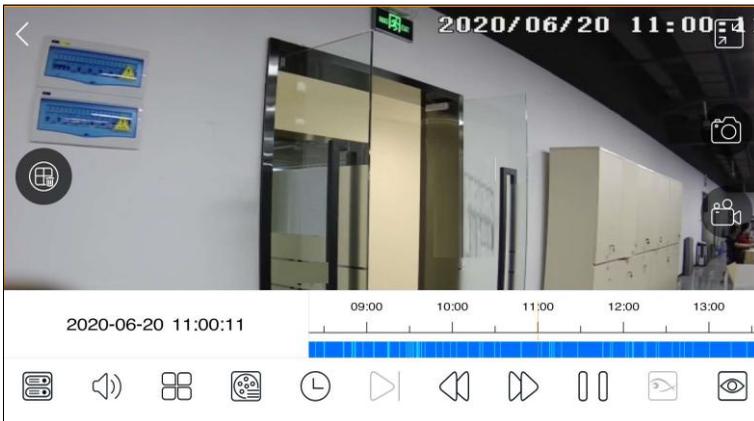

- : Tap it to choose the channel.
- : Open/close the audio.
- : Tap it to select the screen display mode.
- : Choose the recording mode.
- : Tap it to choose date.
- : Open/close the local record.
- : Tap it to choose the definition of the current image.
- : Exit the full screen mode.




Tap it to back up the video.

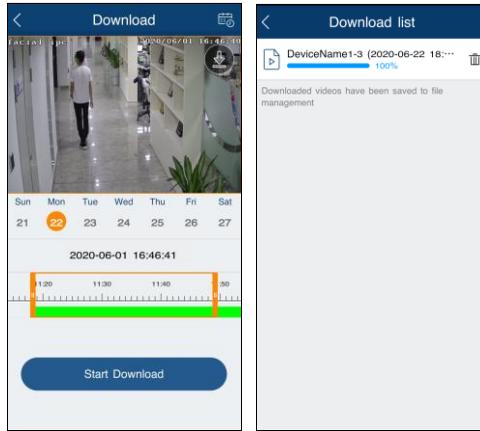

A maximum of 16 backup tasks can be created, but each backup task cannot exceed 30 minutes.

3.8 Remote Setting


In the live interface, tap  icon. This will bring the following menu setup items. Select “Remote setting” to go to the remote setting interface. Then tap the device name to view its function panel (Different devices have different remote setting items). The following pictures are for reference only).

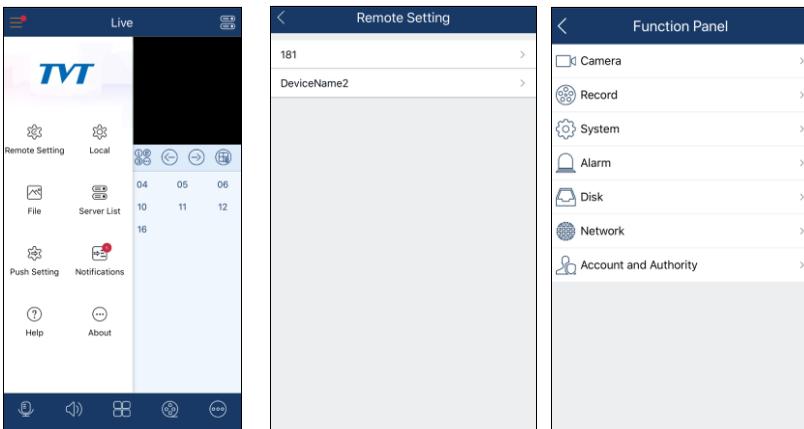

Please refer to the user manual of the device to set the relevant items.

3.9 Local Setting

Select “Local setting” to go to the following interface. Slide down to see all setting items.

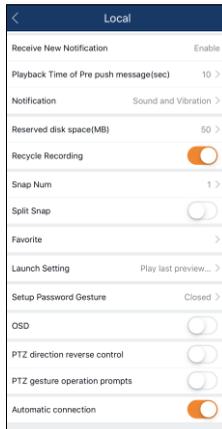

Receive New Notification: please enable or disable it as needed.

Playback Time of Pre push message (sec): Choose the time as needed.

Notification: You can choose “No Disturb” or “Sound and Vibration.


Reserved disk space (MB): 50/100/200/500/1024MB can be optional.

Recycle Recording: Enable/disable record recycle. If enabled, the system will automatically delete the old records and recycle the space if it is completely utilized.

Snap num.: Set the number of snap.

Split snap: Enable/disable split snap.

Favorite: Set the favorite group here after you collect the favorite group.

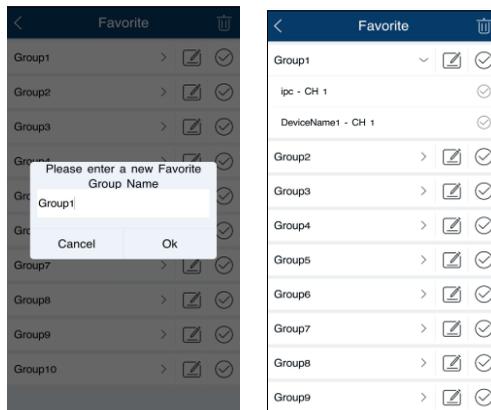

Select the name of the favorite group and tap  icon to modify the name of the

favorite group. Tap  icon to show the channels of the group. Select the channel of the favorite group and tap  icon to delete the channel. Select the group name and tap  icon to delete all channels of the group.

Launch setting: Set to play favorite group or play device or play last preview channels after starting this software.

Setup Password gesture: For your client privacy safety, you can set password gesture.

Screen Rotation Correction: Please enable it as needed.

OSD: You can enable or disable the local OSD.


PTZ direction reverse control: Please enable it as needed.

PTZ gesture operation prompts: Please enable it as needed.

Auto connection: Enable or disable it as desired.

3.10 Server List

In the server list interface, you can add, modify and check the information of the device.

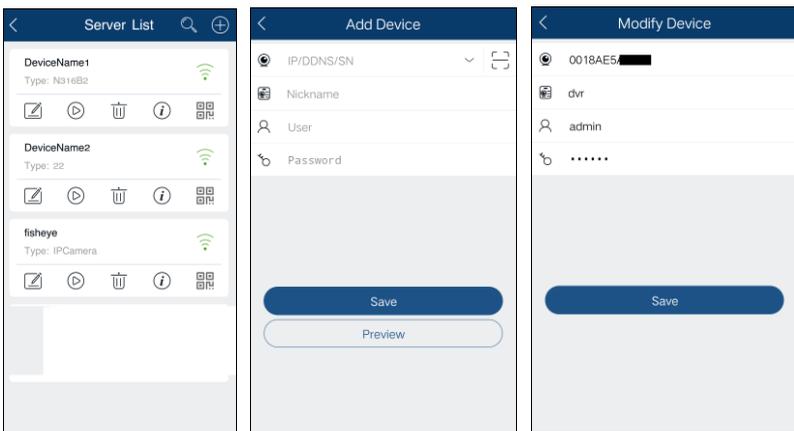

After you go to the server list interface, the added devices will be listed.

 : Tap this icon to return to the live view interface.

 : Connection Status; green means successful connection; grey means connection failure.

 : Tap it to delete the device.

 : Tap it to modify the device.

 : Tap it to view the device information (like device name, firmware version, etc.)

 : Tap it to preview the device.


 : Tap it to enlarge QR code. Press and hold the QR code to share this device.

Tap  to add a device. You can add the device through IP address/domain name/serial number/scanning the QR code.

: Tap it and enter the key words to search the desired device.

3.11 File Management

Go to the file interface as shown below.

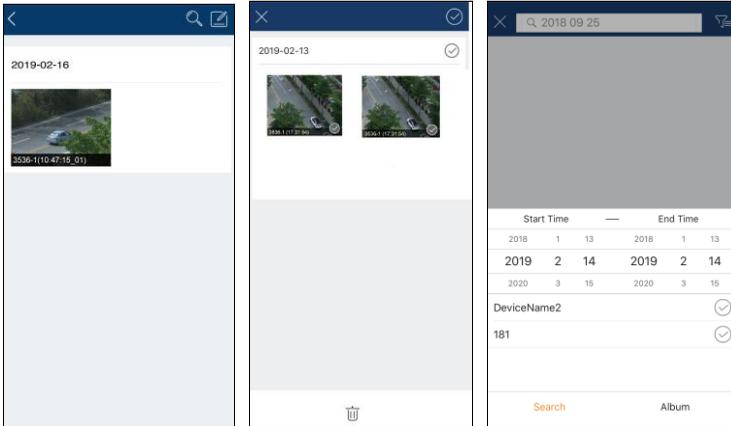

Icon Instruction:

 : Return to the live view interface.

 : Selection.

 : Search


 : Tap it to set the specific start and end time and choose the desired devices.

Tap  to search files. You can search files by entering date, time, device name and/or channel. Separate terms with a space.

Tap  and then tap  to select files. Then tap  to delete these selected files.

Picture View:

Select one picture and tap it to view this picture as shown below.

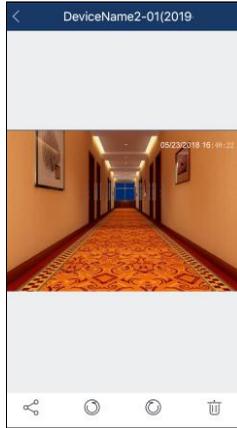

: Return to the previous interface.



: Tap it to rotate a picture to the left.





: Tap it to rotate a picture to the right.



: Tap it to delete the picture.




: Tap it to share pictures on different social media platforms, like Twitter, Facebook, etc. Additionally, videos can be shared on Dropbox here.

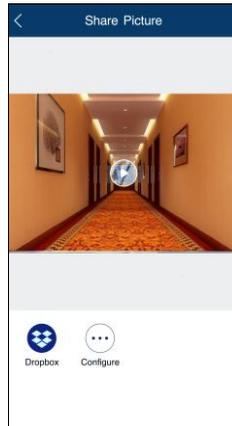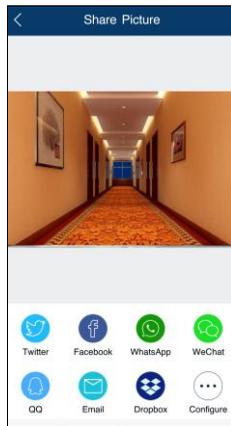

In the file management interface, the local record file can be searched. Tap the play button in the middle of the picture to play the local record file.

3.12 Push Setting

You can push the information of online devices as shown below.

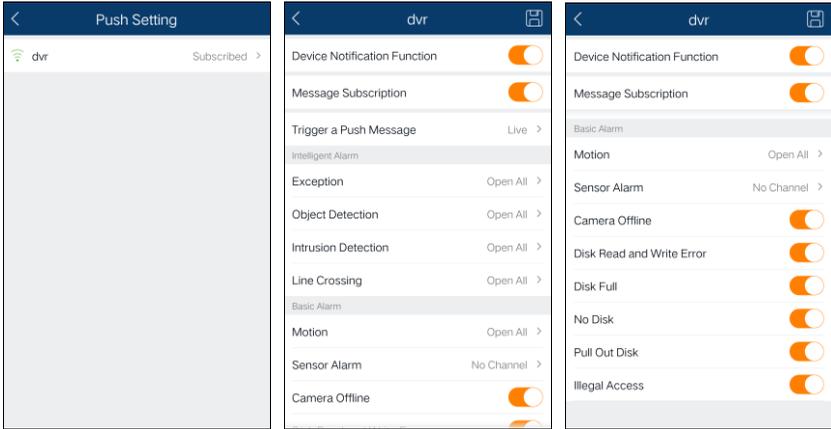

When an alarm event happens, the alarm information will pop up as shown below.




- Tap  to view the current video.
- Tap  to view the record.
- Tap  to set alarm out.


3.13 Notifications

After you enable the device notification function in Push Setting, you can receive the relative information.

Mobile Surveillance User Manual

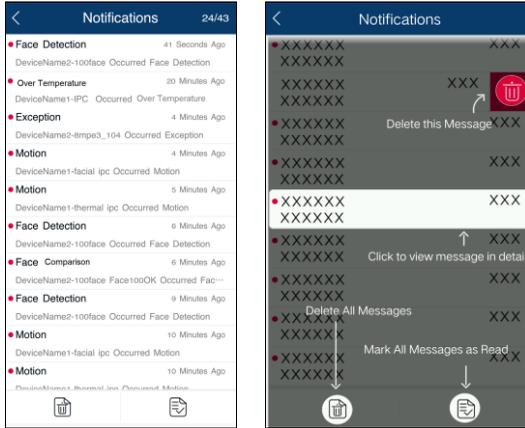


You can view the detailed alarm information of over temperature and watch the playback in the notification interface.

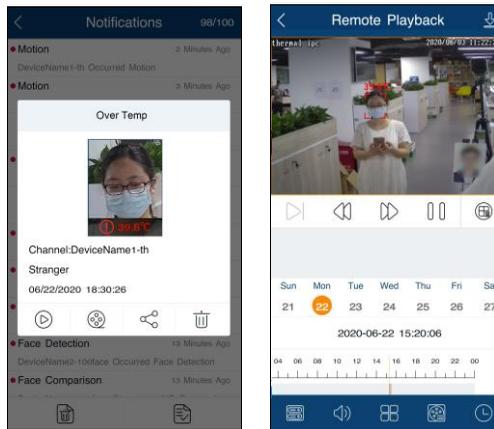


3.14 Help

You may view the help documentations in respect of live view, remote playback, server list, file, remote setting, local setting and so on in the help interface.

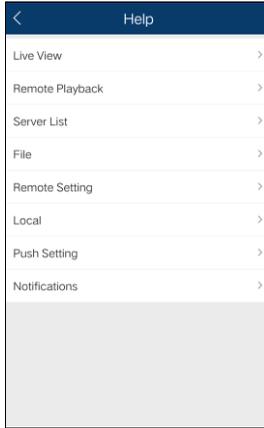

3.15 About

In this interface, you can check the information of the software version. Choose Share APP and then press and hold the QR CODE to share the information of the software. Tap “Detect new version to find the new version.

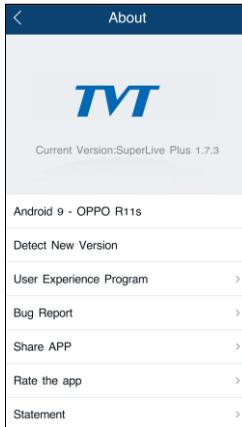

Select “Rate the app” to give a score for the APP.

Bug Report: when the APP crash or failure occurs, you can choose this item and send the bug report to the technical support of the APP for quickly solving the problem.

To send a bug report:

- ① Tap “User Experience Program” to agree the privacy statement.
- ② Tap the log report to show a QRcode.
- ③ Save this QRcode and send it to the technical support of the APP.

Note: You also can tap the “Send bug report” button to generate a bug report.

Shenzhen TVT Digital Technology Co., Ltd

Address: 23th Floor, Block B4, Building No.9, Shenzhen Bay
Eco-Technology Park, Nanshan District, Shenzhen, Guangdong
Province, PR China

Email: overseas@tvt.net.cn

Website: <http://en.tvt.net.cn>